
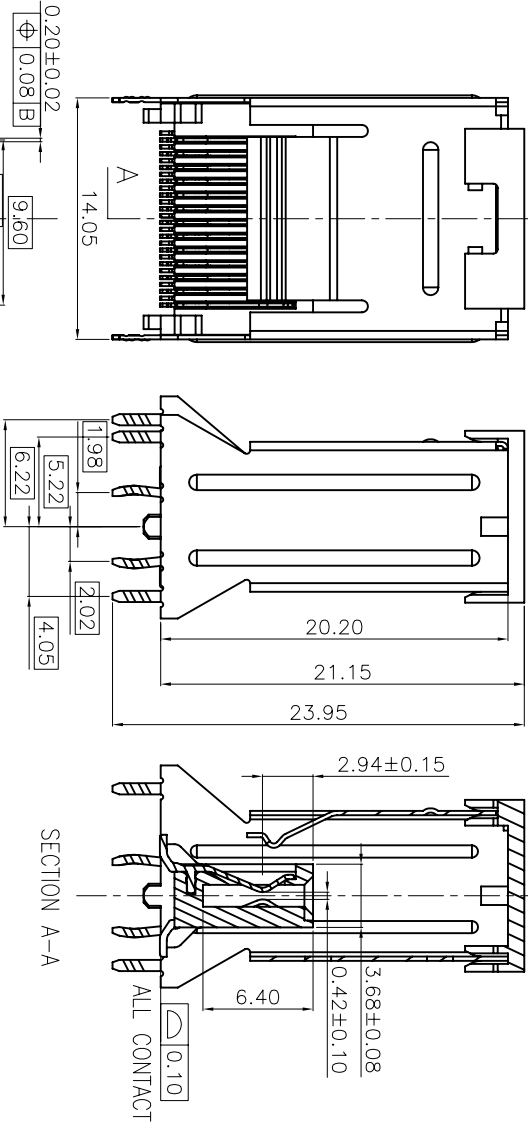



PART NO. SEE TABLE

REVISIONS			
LTR	DESCRIPTION	Drawing	DATE
AO	NEW	B.I.L.T.	10/28/07

CUSTOMER
DRAWING



SECTION A-A

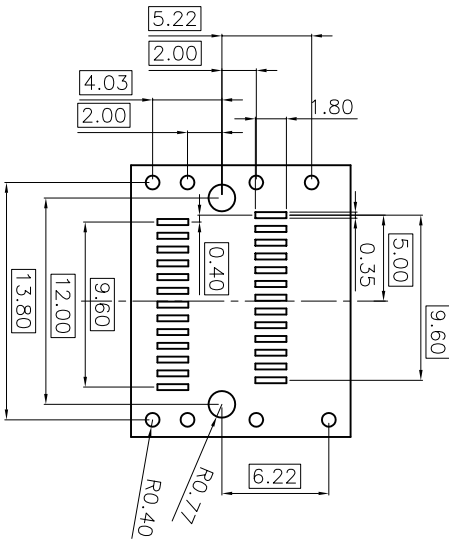

RECOMMENDED PCB LAYOUT

NOTE:

- 1.MATERIAL : BASE&COVER: HIGH THERMOPLASTIC UL94V-0, COLOR : BLACK
TERMINAL: COPPER ALLOY, T= 0.20 mm
SHELL: STEEL,T= 0.25 mm
- 2.PLATING:
CONTACT:GOLD PLATED ON THE CONTACT.
TIN PLATED ON THE SOLDER TAIL.
NICKEL UNDERPLATED OVER ALL.
- 3.ELECTRONICAL SPECIFICATION:
SHELL: NICKEL UNDERPLATED OVER ALL.
CURRENT RATING: 0.5 AMPERE PER CONTACT
CONTACT RESISTANCE: 20 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 300 VAC.
OPERATING TEMPERATURE: -25° C~+85° C

4.MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT(ROHS)

TABLE 1

020-01-00318	15U"	LCP BLACK
020-01-00319	30 U"	LCP BLACK
PART NO.	PLATED	PLASTIC&COLOR

A

B

C

D

DESCRIPTION				QTY	UNIT	DO NOT SCALE DRAWING	E-GREEN				
TITLE:				DRAWN				DATE			
SAS 26P SOCKET 180° SMT TYPE				CHECKED				10/28/07			
APPROVALS				SIZE				SCALE:			
				mm				1 : 1			
				REV.				DRAWING NO.			
								000540			
				P.N.O.				XXXXXXX			
				SHEET				1 OF 1			