




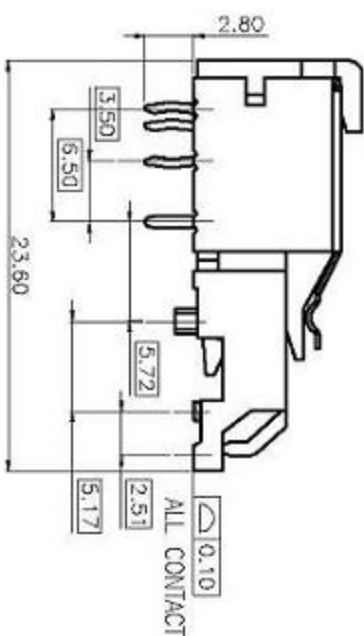
CUSTOMER
DRAWING

TABLE 1

020-01-00320	19U"	LCP BLACK
020-01-00321	30 U"	LCP BLACK
PART NO.	PLATED	PLASTIC&COLOR

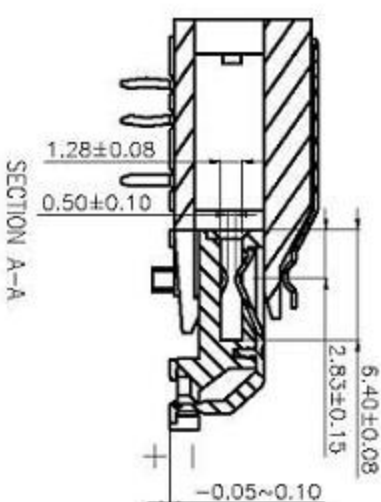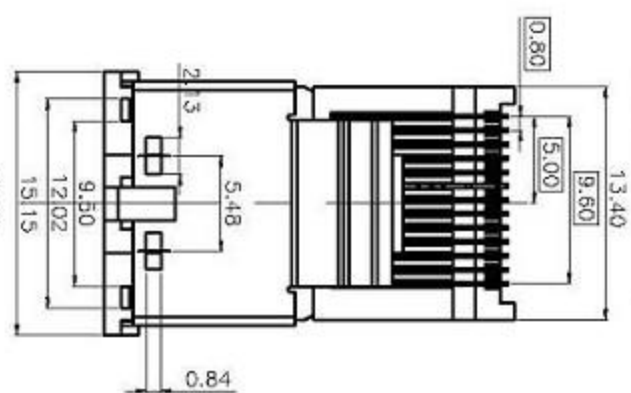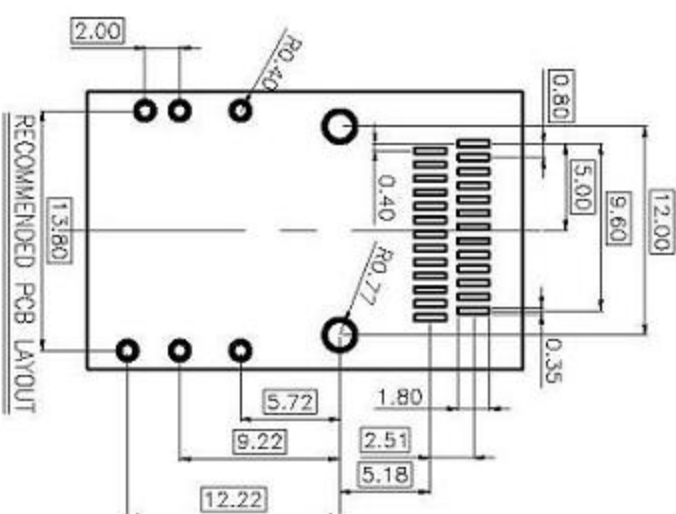

RECOMMENDED PCB LAYOUT

NOTE:

1.MATERIAL:

BASE: HIGH THERMOPLASTIC UL94V-0, COLOR: BLACK
 TERMINAL: COPPER ALLOY, T=0.20 mm
 SHELL: STEEL, T=0.25 mm.

2.PLATING:

CONTACT: GOLD PLATED ON THE CONTACT.
 TIN PLATED ON THE SOLDER TAIL.

NICKEL UNDERPLATED OVER ALL.
 SHELL: NICKEL UNDERPLATED OVER ALL.

3.ELECTRONICAL SPECIFICATION:

CURRENT RATING: 0.5 AMPERE PER CONTACT
 CONTACT RESISTANCE: 20 MILLIOHMS MAX.
 INSULATION RESISTANCE: 1000 MEGOHMS MIN.
 DIELECTRIC WITHSTANDING VOLTAGE: 300 VAC.
 OPERATING TEMPERATURE: -25°C~+85°C

4.MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE
 EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY
 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS
 SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (ROHS)

LTR	DESCRIPTION	Drawing	DATE
A0	NEW	BILL	10/27/07

REVISIONS

E-GREEN

TITLE:
SAS 26P 90° SOCKET SMT TYPESCALE: 1:1
DRAWING NO. 000541
REV. A0

DESCRIPTION

NO

QTY

UNIT

DO NOT SCALE DRAWING

DRAWN

CHECKED

APPROVALS

DATE

BILL

10/27/07

DATE

BILL

10/27/07

DATE

BILL

10/27/07

DATE

BILL

10/27/07

DATE

BILL

10/27/07

DATE

BILL

10/27/07

DATE

BILL

10/27/07

DATE

BILL

10/27/07

DATE

BILL

10/27/07

DATE

BILL

10/27/07