



PART NO.		007-01-00332	
CUSTOMER DRAWING			
REVISIONS			
LTR	DESCRIPTION	Drawing	DATE
A	Initial Release for Manufacture	BILL	03/23/07
B	??????????	BILL	06/23/07
C	??????	BILL	07/19/07
D	??????????	BILL	10/27/07

CUSTOMER DRAWING

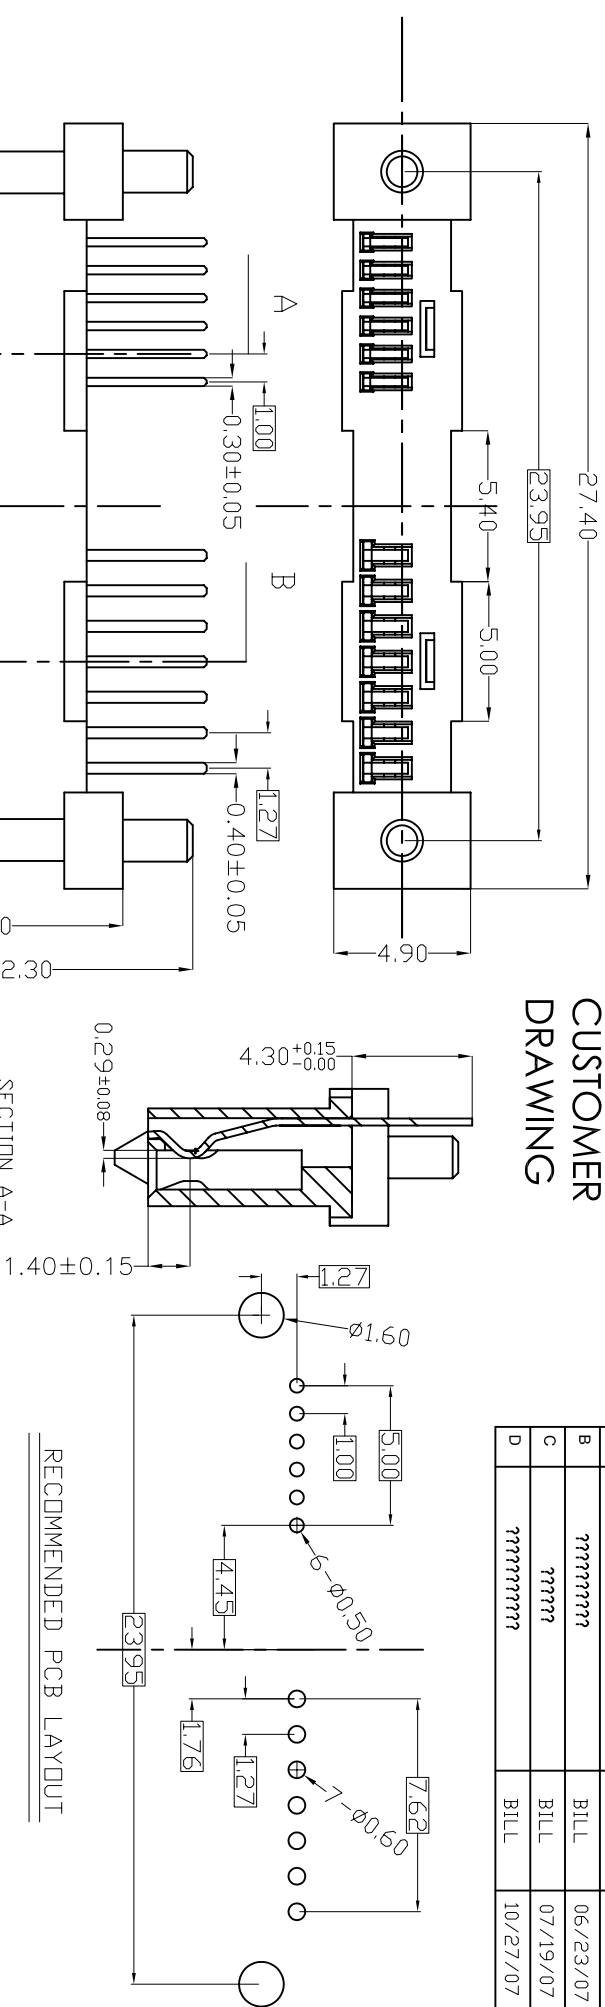

RECOMMENDED PCB LAYOUT

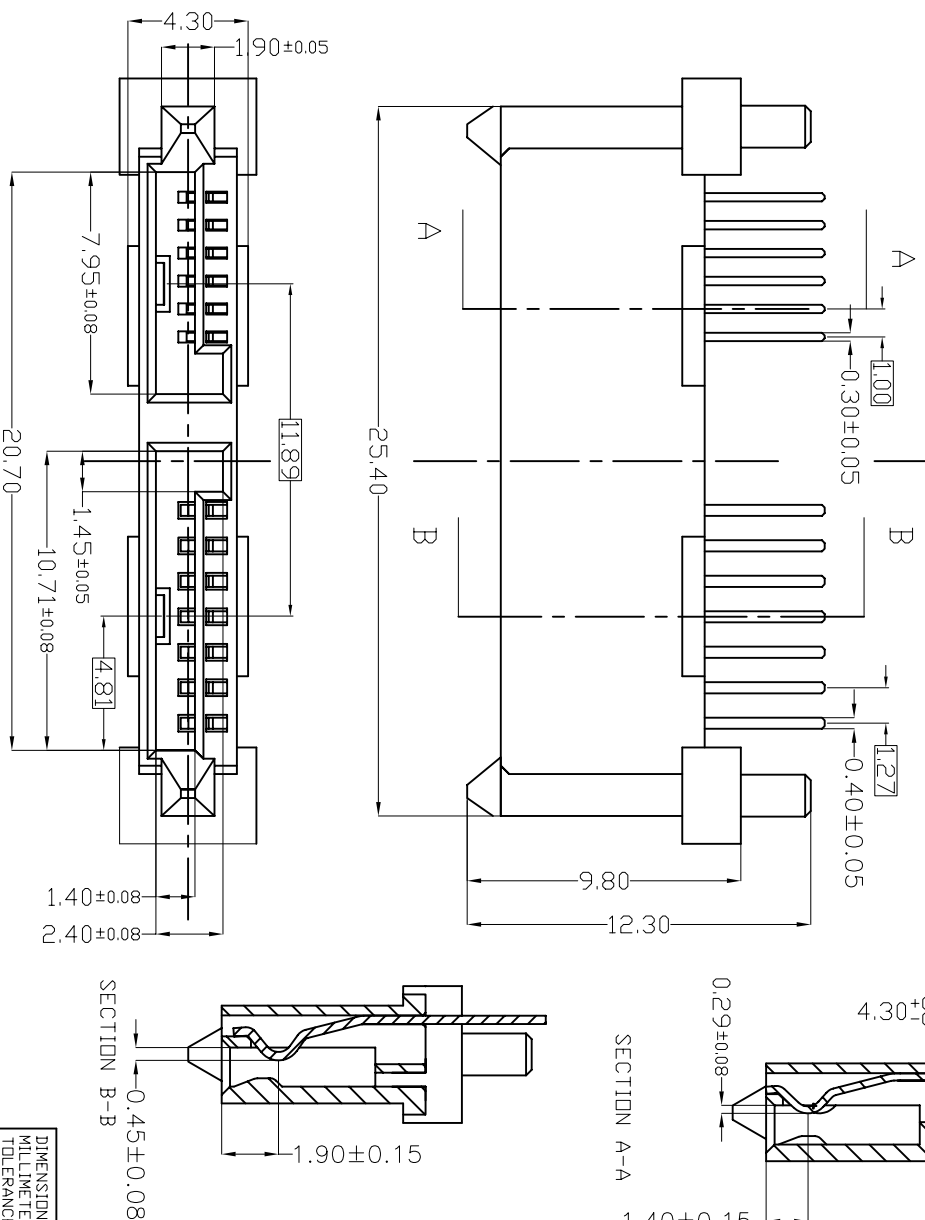

NOTE:
1.MATERIAL : BASE:HIGH TEMPERATURE THERMOPLASTIC
TERMINAL: COPPER ALLOY,T= 0.30&0.25 mm.
2.PLATING:
CONTACT:GOLD PLATIN ON CONTACT AREAS,
TIN PLATED ON SOLDER TAILS;
NICKEL UNDERPLATE DVER ALL.
3.ELECTRONICAL SPECIFICATION:
CURRENT RATING: 1.5 AMPERE PER CONTACT
CONTACT RESISTANCE: 30 MILLIDHMS MAX.
INSULATION RESISTANCE: 1000 MEGDHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.
OPERATING TEMPERATURE: -40°C~+85°C
4.THE PRODUCT SHOULD BE GP COMPLIANCE

NO		DESCRIPTION		QTY	UNIT	DO NOT SCALE DRAWING	
		10.71±0.08		20.70		1	
		1					
		DIMENSION ARE MILLIMETERS		TOLERANCES ARE DECIMALS			
		.X ± 0.20		.XX ± 0.15			
		ANGLE:		X ± 1°			
		APPROVALS		DATE			
		DRAWN		BILL		10/27/07	
		CHECKED					
		APPROVALS					
		SIZE		SCALE:		DRAWING NO.	
		mm		1 : 1		000430	
		D NO.		XXXXXXXXXX		SHEET 1 OF 1	