
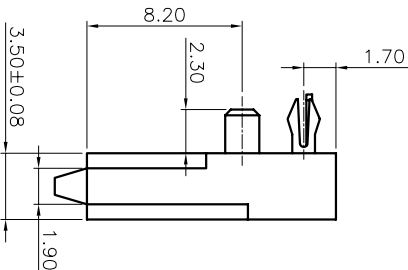
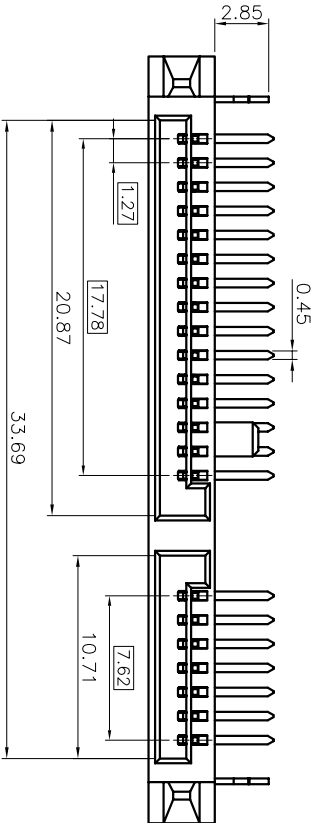


PART NO. SEE TABLE

REVISIONS			
LTR	DESCRIPTION	Drawing	DATE
A	RELEASE NEW PRODUCT	GARY	11/05/07

CUSTOMER DRAWING

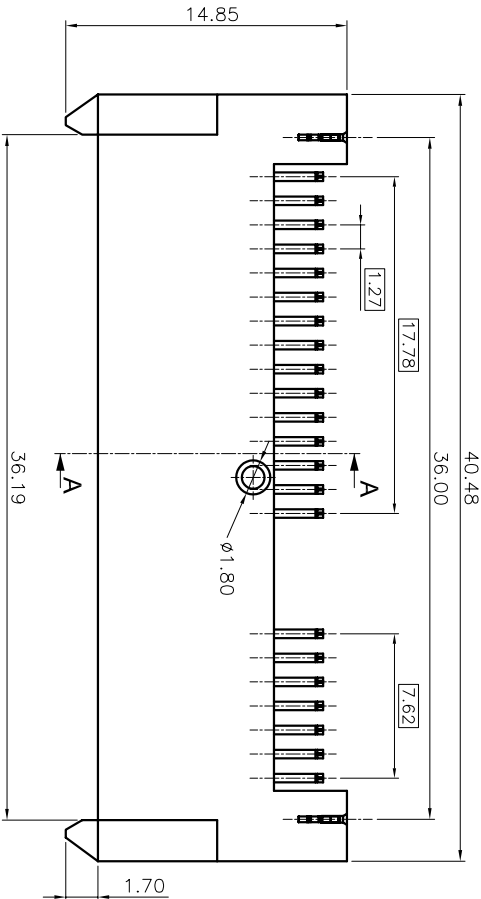

剖面圖 A-A

TABLE

007-01-00523	15 U" GOLD	LCP BLACK
PART NO.	PLATED	PLASTIC&COLOR

NOTE:

- 1.MATERIAL :
BASE : HIGH TEMPERATURE THERMOPLASTIC UL94V-0,
TERMINAL: COPPER ALLOY, THICKNESS = 0.30 mm
FORKLOCK: COPPER ALLOY, THICKNESS = 0.30 mm
- 2.PLATING:
CONTACT: GOLD OVER 50u" MIN NICKEL UNDERPLATE
SOLDER TAIL: 150u" MIN MISTY TIN 50u" MIN NICKEL
UNDERPLATE
GOLD SPECIFICATION: SEE TABLE
- 3.ELECTRONICAL SPECIFICATION:
CURRENT RATING: 15 AMPERE PER CONTACT
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VDC.
OPERATING TEMPERATURE: -40°C~+85°C
- 4.MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC
OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27
JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN
HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC
EQUIPMENT (ROHS)

NO	DESCRIPTION			QTY	UNIT	DO NOT SCALE DRAWING	D NO.	XXXXXXXXXX	SHEET 1 OF 1
----	-------------	--	--	-----	------	----------------------	-------	------------	--------------

APPROVALS			DATE	E-GREEN				
DRAWN	GARY		11/05/07	TITLE: SATA 22P SOCKET DIP 無熱高導柱型				
CHECKED								
APPROVALS								
				SIZE	SCALE:	DRAWING NO.	REV.	
				mm	1 : 1	000554	A	