
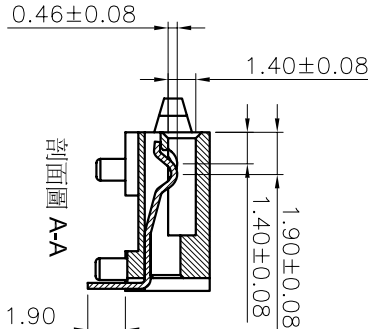


PART NO. SEE TABLE


CUSTOMER
DRAWING

REVISIONS			
LTR	DESCRIPTION	Drawing	DATES
A	RELEASE NEW PRODUCT	GARY	11/06/07

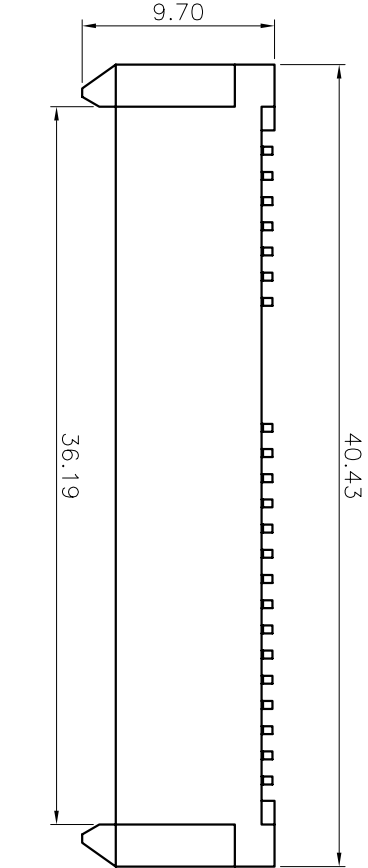

TABLE

007-01-00524	15 U" GOLD	LCP BLACK
PART NO.	PLATED	PLASTIC&COLOR

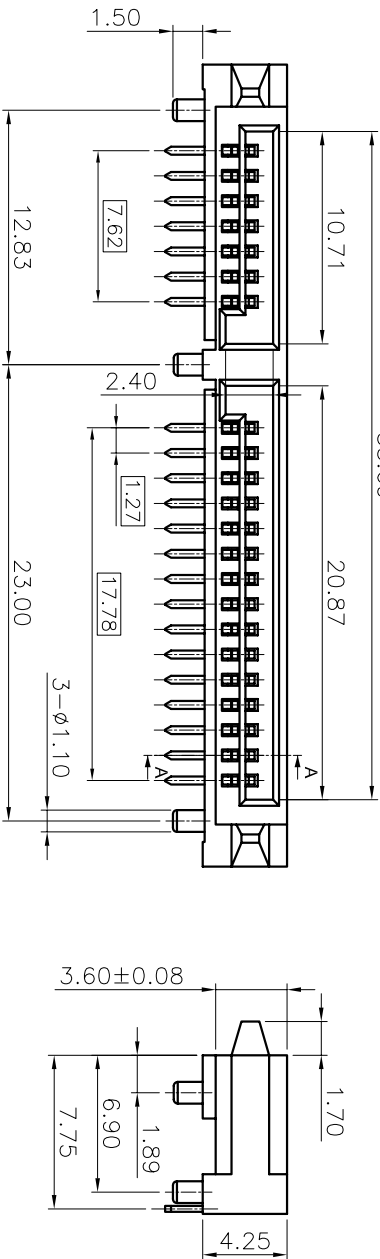

NOTE:
1.MATERIAL :
BASE : HIGH TEMPERATURE THERMOPLASTIC UL94V-0,
TERMINAL: COPPER ALLOY, THICKNESS = 0.30 mm
2.PLATING:
CONTACT: GOLD OVER 50u" MIN NICKEL UNDERPLATE
SOLDER TAIL: 150u" MIN MISTY TIN 50u" MIN NICKEL
UNDERPLATE
GOLD SPECIFICATION: SEE TABLE
3.ELECTRONICAL SPECIFICATION:
CURRENT RATING: 15 AMPERE PER CONTACT
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VDC.
OPERATING TEMPERATURE: -40°C~+85°C
4.MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC
OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27
JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN
HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC
EQUIPMENT (ROHS)

A

B

C

D

NO

DESCRIPTION

QTY

UNIT

DO NOT SCALE DRAWING

P NO. XXXXXXXXX

SHEET 1 OF 1

E-GREEN

TITLE: SATA 22P SOCKET 無熱高DP三柱型

APPROVALS	DATE
DRAWN	11/06/07
CHECKED	
APPROVALS	

DIMENSION ARE
MILLIMETERS
TOLERANCES ARE:

X ± 0.20
XX ± 0.15
ANGLE:
X ± 3°

RECOMMENDED PCB LAYOUT

PCB EDGE

RECOMMENDED PCB LAYOUT