

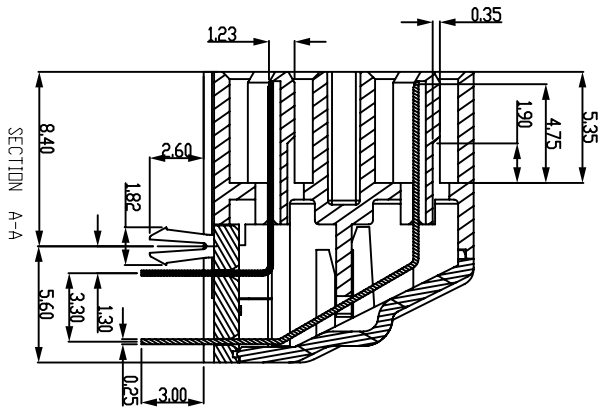
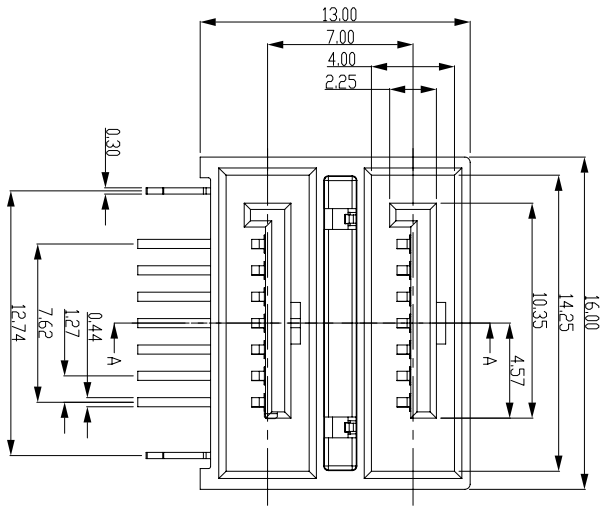
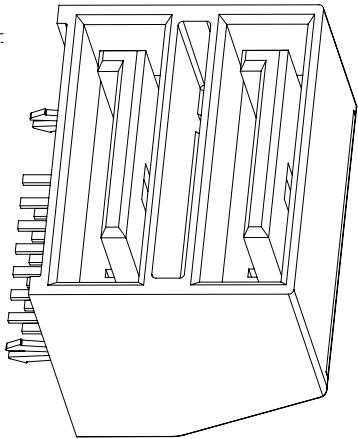


REV	DESCRIPTION	DATE
0	???	112006

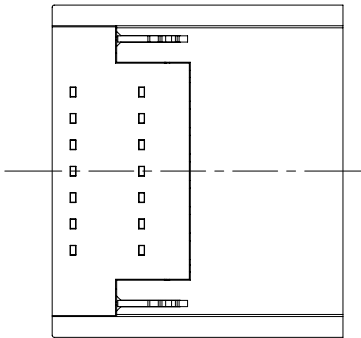

Ordering Information
SA 1 C 07 - C X 484 XA
Contact Area Plating
5415 ? " Gold/LEAD-FREE(100%)TIN
6301 ? " Gold/LEAD-FREE(100%)TIN
7Gold Flash/LEAD-FREE(100%)TIN
...
Color/Material:
C=Black/LCP

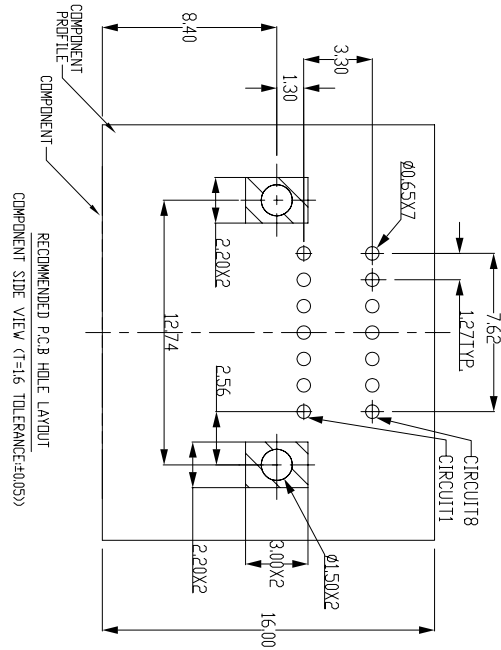

NOTES:
MATERIAL:
HOUSING/THERMAL PLASTIC,UL94 V-0 RATE ,COLOR:BLACK
CONTACT:BRASS
PLATING:
GOLD PLATED OVER NICKEL, ON CONTACT AREA;
TIN PLATED ON SOLDER TAIL.
ELECTRICAL SPECIFICATION
OPERATION VOLTAGE:100 VACmax;
CURRENT RATING:15 AMPERE PER CONTACT.
CONTACT RESISTANCE:30 MILLIOHMS max,
INSULATION RESISTANCE:1000 MEGOHMS min,
DIELECTRIC WITHSTANDING VOLTAGE:500 VAC
ENVIRONMENTAL
OPERATING TEMPERATURE:-55°C TO +125°C.

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	SCALE: 4:1	NUMBER	E-GREEN ENTERPRISE CO., LTD.			
	MM	INCH	MATERIAL	DATE	DRAWN BY	CHECKED BY	DATE
	±0.25	±			HUHUUA		112006
	±0.15	±					
	±0.05	±					
	ANGULAR ±3°						
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						
	APPROVED BY DATE	PART NO.	SA1007-CX484XA	DWG NO.	SA1A-1484C2A	SHEET NO.	1/1
	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO E-GREEN INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						