
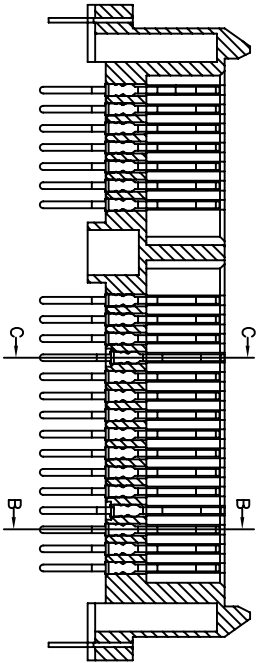
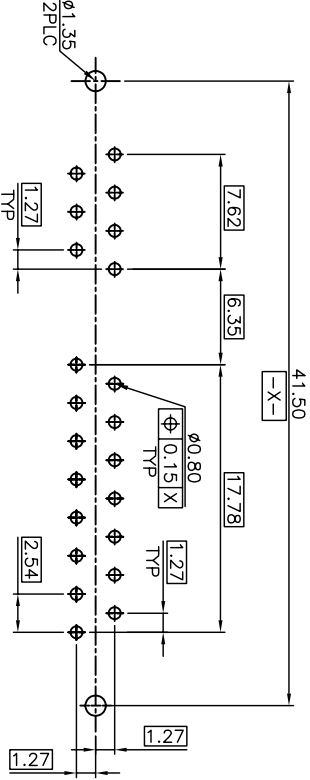
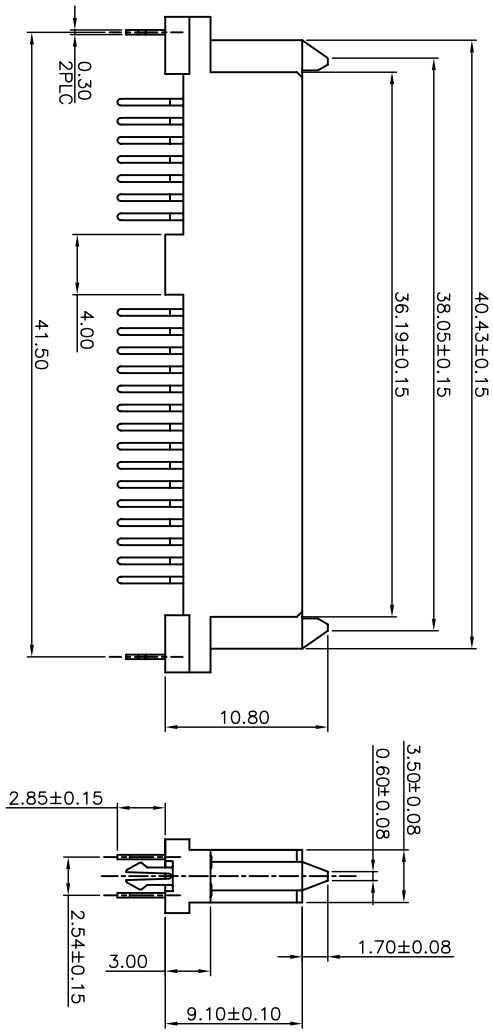




REV	DESCRIPTION	APPR	CHECK	DRAW	DATE
△	原始圖檔		JAMES	JANET	050325

NOTES:
MATERIAL:
HOUSING:THERMOPLASTIC HIGH TEMP WITH 30%G/F UL94 V-0
COLOR:BLACK
CONTACT:PHOSPHOR BRONZE C5191 H,T=0.30mm
BOARD LOCK:BRASS C2680 H,T=0.30mm
FINISH:
CONTACT:15u" GOLD/TIN PLATING ON CONTACT AREA
100u" MINLEAD-FREE (100%) TIN PLATING ON SOLDERTAILS
50u" MIN.NICKEL UNDERPLATING OVER ALL
BOARD LOCK:100u" MINLEAD-FREE (100%) TIN PLATING ON SOLDERTAILS
50u" MIN.NICKEL UNDERPLATING OVER ALL

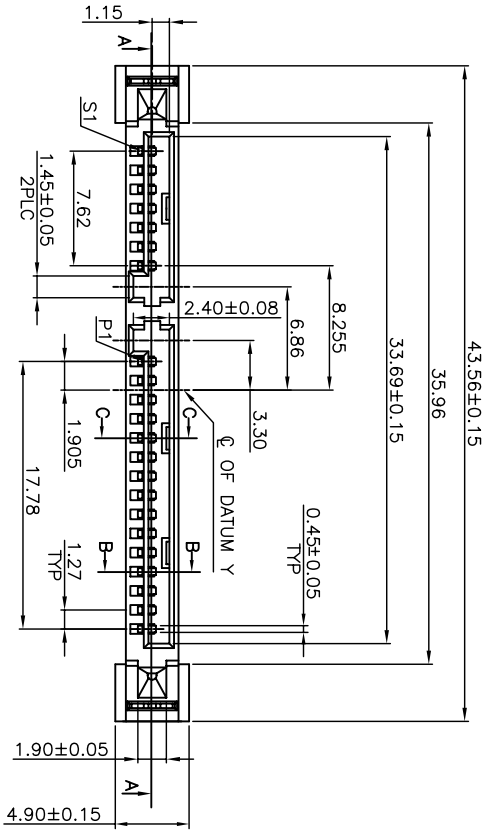

SECTION A-A

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	SCALE: 4:1	NUMBER:	TITLE:	
▽0	MM	MATERIAL:	HRG:	DATE	SATA 7+15P板端雙排腳魚叉DIP型
▽0	INCH	DATE	陳麗鳳	050325	
	.X ±0.38 .X ±	CHECKED BY DATE	JAMES	050325	
	.XX ±0.25 .XX ±	APPROVED BY DATE			
	.XXX ±0.13 .XXX ±				
	ANGULAR ±3°				
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				
		PART NO.	DWG. NO.	SHEET NO.	
			SATA-1259C2A	1/1	

E-GREEN

RECOMMEND PCB LAYOUT
PCB TOLERANCE:±0.05