

CUSTOMER
DRAWING

REVISIONS		
LTR	DESCRIPTION	DATE
C	Initial Release for Manufacture	Jim 02/27/05





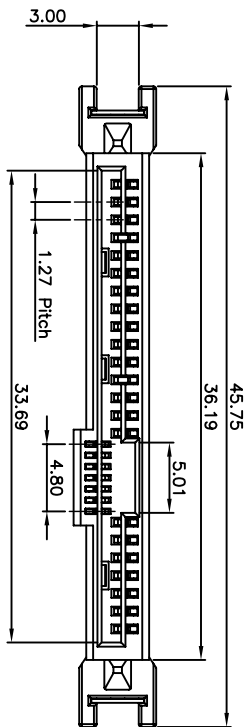


TABLE 1			
020-01-00024	30 U" GOLD	BLACK	
020-01-00023	15 U" GOLD	BLACK	
020-01-00022	5 U" GOLD	BLACK	
020-01-00021	GOLD FLASH	BLACK	
PART NO.	PLATED	COLOR FOR THE PLASTIC	

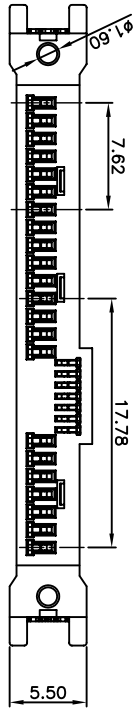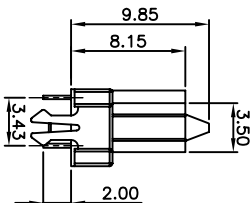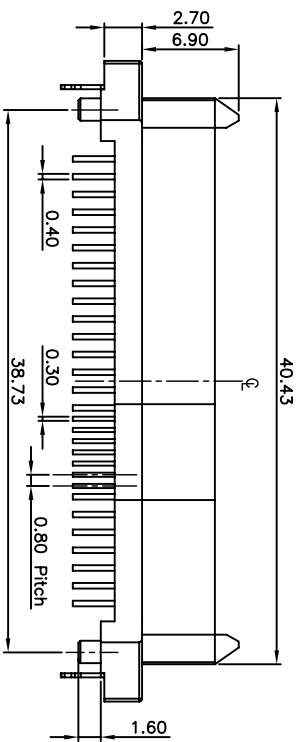

RECOMMENDED PCB LAYOUT

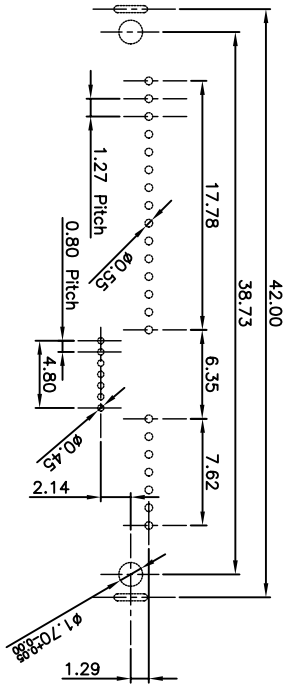

- NOTES:
- 1.MATERIAL :
- HOUSING : LIQUID CRYSTAL POLYMAR(LCP), G.F.30%,
UL94V-0, COLOR : BLACK
- TERMINAL: PHOSPHOR BRONZE.C5191 EXTRA HARD (H06)
THICKNESS = 0.30 mm
- FORKLOCK: BRASS ,C2680-H EXTRA HARD (H06)
THICKNESS = 0.30 mm
- 2.TERMINAL AND FORKLOCK PLATING :
- CONTACT AREA : (o) GOLD FLASH
(b) GOLD (Au),30 MICROINCH MINIMUM
- SOLDER TAIL : TIN,75 MICROINCH MINIMUM
UNDER PLATE : NICKEL (Ni),50 MICROINCH MINIMUM

DESCRIPTION		QTY	UNIT	1	
ND	4	3	4	ID NO.	SHEET 1 OF 1

DIMENSION ARE MILLIMETERS ARE : DECIMALS 0.25 X ± 0.20		APPROVALS	DATE	E-GREEN	
ANGLE: X ± 3°		Jim	02/27/05	TITLE:	
DIMENSION IN BRACKET TOLERANCES ARE: DECIMALS X ± 3°		CHECKED		ASSEMBLY OF SAS 29P Vertical DIP(2 ROW)	
APPROVALS		APPROVALS		SIZE SCALE : DRAWING NO.	
DO NOT SCALE DRAWING				1 : 1 000188	
				REV. C	