

CUSTOMER
DRAWING

REVISIONS		
LTR	DESCRIPTION	Drawing DATE
B	Initial Release for Manufacture	Marcy 09/20/05




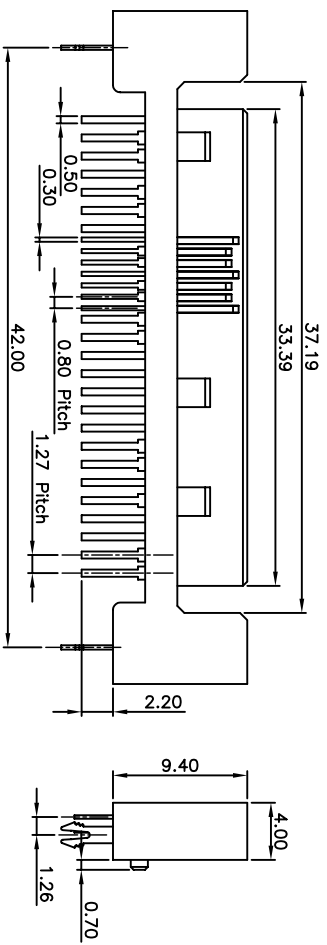


TABLE 1

020-01-00124	30 U" GOLD	BLACK
020-01-00123	15 U" GOLD	BLACK
020-01-00122	GOLD FLASH	BLACK
PART NO.	PLATED	COLOR FOR THE PLASTIC

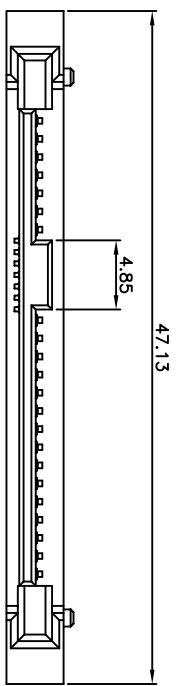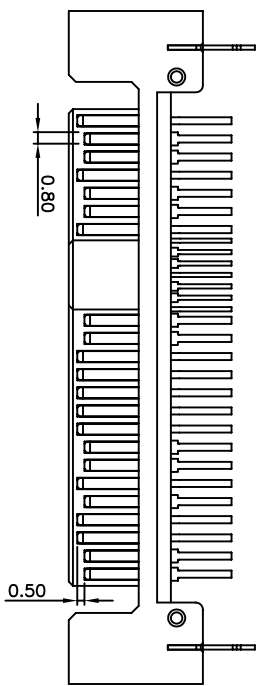

RECOMMENDED PCB LAYOUT

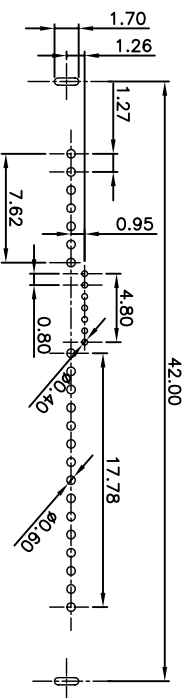

NOTE:
1.MATERIAL :
HOUSING : High Temperature thermoplastic ,
UL94V-0, COLOR : BLACK
TERMINAL(max):Copper alloy,THICKNESS = 0.30 mm
TERMINAL(min):Copper alloy,THICKNESS = 0.25 mm
FORKLOCK: Copper alloy,THICKNESS = 0.30 mm
2.PLATING:
CONTACT:GOLD OVER 50u" MIN NICKEL UNDERPLATE(SEE TABLE1)
SOLDER TAIL:75u"MIN TIN 50u" MIN NICKEL UNDERPLATE
GOLD SPECIFICATION:
a, Flash; b, 15u", c, 30u";
3.ELECTRONICAL SPECIFICATION:
CURRENT RATING:1.5 AMPERE PER CONTACT
CONTACT RESISTANCE:30 MILLIOHMS MAX.
INSULATION RESISTANCE:1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE:500 VAC.
OPERATING TEMPERATURE:-55C° ~+125C°

DESCRIPTION			QTY	UNIT	DO NOT SCALE DRAWING		
ND	4	3	4	2	1	1	1

DIMENSION ARE MILLIMETERS			APPROVALS		DATE		E-GREEN				
TOLERANCES ARE :			DRAWN		Marcy					09/20/05	
DECIMALS			CHECKED								
.X ± 0.30 .XX ± 0.25			APPROVALS								
ANGLE: X ± 3°									TITLE: SAS 29P HEADER Vertical DIP		
			SIZE		SCALE :		DRAWING NO.		REV.		
			mm		1 : 1		000195		B		
DO NOT SCALE DRAWING			D.NO.		XXXXXXXXXX				SHEET 1 OF 1		