

PART NO. SEE TABLE 1

4

3

2

1

REVISIONS		DATE
DESCRIPTION	Drawing	
LTR		
Add Material of Base	Marcy	11/23/05
E		

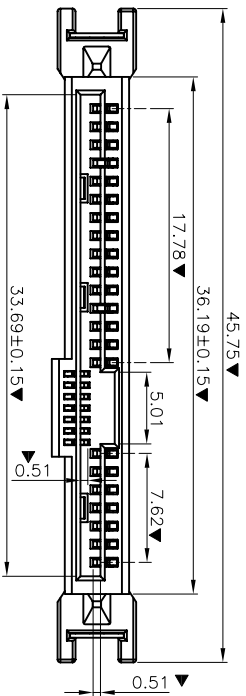


TABLE 1

020-01-00136	30 U" GOLD	NY9T BLACK
020-01-00135	15 U" GOLD	NY9T BLACK
020-01-00134	GOLD FLASH	NY9T BLACK
020-01-00012	30 U" GOLD	LCP BLACK
020-01-00011	15 U" GOLD	LCP BLACK
020-01-00009	GOLD FLASH	LCP BLACK
PART NO.	PLATED	COLOR FOR THE PLASTIC

NOTE:

1.MATERIAL :

BASE:(1):NY-9T(PUYUE),G.F.30%, UL94V-0, COLOR : BLACK
(2):LIQUID CRYSTAL POLYMAR(LCP ShiHua MG350),

G.F.30%, UL94V-0, COLOR : BLACK

TERMINAL(max): PHOSPHOR BRONZE,C5191-H EXTRA HARD

THICKNESS = 0.30 mm

TERMINAL(min): PHOSPHOR BRONZE,C5191-H EXTRA HARD

THICKNESS = 0.25 mm

FORKLOCK: BRASS ,C2680-H EXTRA HARD

THICKNESS = 0.30 mm

2.PLATING:

CONTACT:GOLD OVER 50u" MIN NICKEL UNDERPLATE(SEE TABLE1)

SOLDER TAIL:150u"MIN TIN 50u" MIN NICKEL UNDERPLATE

GOLD SPECIFICATION:

a,Flash: b, 15u"; c,30u";

3.ELECTRONICAL SPECIFICATION:

CURRENT RATING:1.5 AMPERE PER CONTACT



CONTACT RESISTANCE:30 MILLIOHMS MAX.

INSULATION RESISTANCE:1000 MEGOHMS MIN.


DIELECTRIC WITHSTANDING VOLTAGE:500 VAC.

OPERATING TEMPERATURE:-55C° ~+125C°

4.ALL DIMENSION MEASURE BY FAI,MARK▲ MUST BE CONTROL BY QC

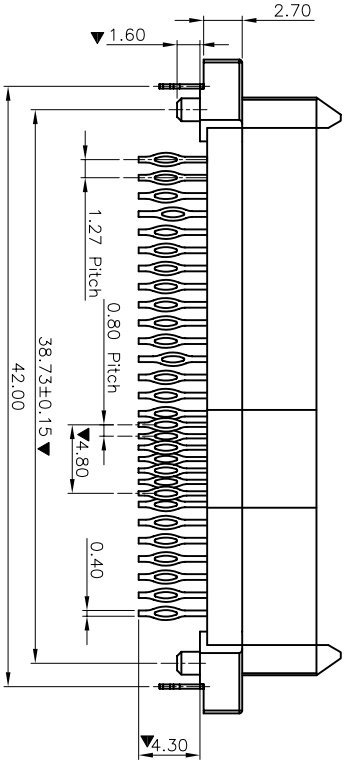

RECOMMENDED PCB LAYOUT

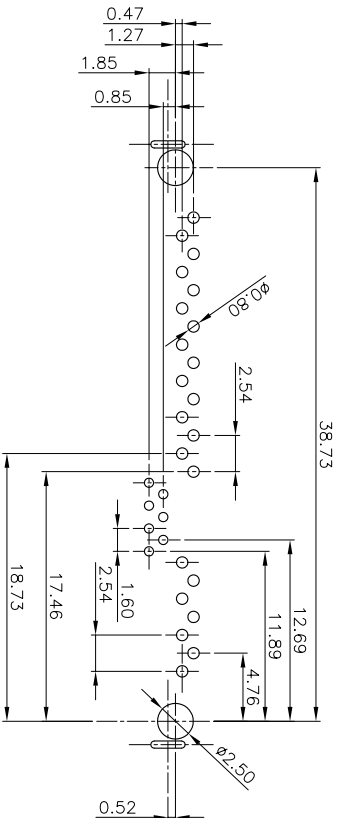

NO

DESCRIPTION

QTY

UNIT

DO NOT SCALE DRAWING

D NO.

XXXXXXX

SHEET 1 OF 1

E-GREEN

ASSEMBLY OF SAS 29P DIP

(Press Fit Type)

SCALE : 1 : 1

DRAWING NO. 100073

REV. E