

PART NO.	SEE TABLE 1
----------	-------------

REVISIONS		
LTR	DESCRIPTION	DRAWING DATE
B	Initial Release for Manufacture	JohnW 02/25/04


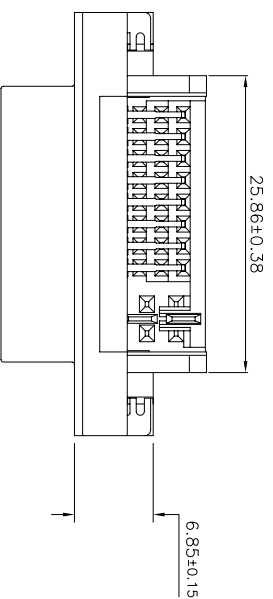



TABLE 1


PART NO.	PLATED	COLOR FOR THE PLASTIC
001-01-00063	30 U" GOLD	GRAY
001-01-00062	15 U" GOLD	GRAY
001-01-00061	GOLD FLASH	GRAY
001-01-00060	30 U" GOLD	WHITE
001-01-00059	15 U" GOLD	WHITE
001-01-00058	GOLD FLASH	WHITE
001-01-00057	30 U" GOLD	BLACK
001-01-00056	15 U" GOLD	BLACK
001-01-00055	GOLD FLASH	BLACK

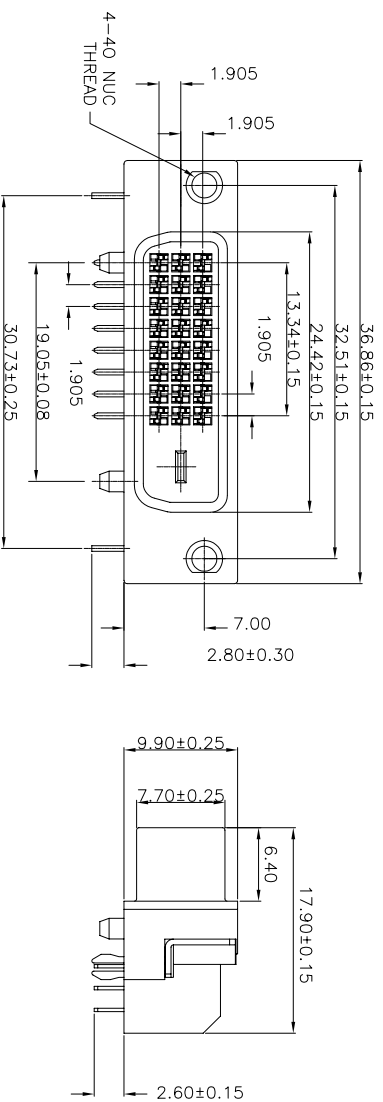

NOTES:

- 1.ENVIRONMENTAL: TEMPERATURE RANGE -20° TO +85°.
- 2.ELECTRICAL:
RATED: 1.5A @ 40V AC (ms)
CONTACT RESISTANCE: 20 MILLIOHMS MAXIMUM
INSULATION RESISTANCE: 1000 MEGOHMS MINIMUM
DIELECTRIC WITHSTANDING VOLTAGE:500V AC (ms)
- 3.MECHANICAL:
MATING FORCE: 10 LB.(4.5kg) MAXIMUM
UNMATING FORCE: 2.2LB.(1kg) MINIMUM,8.8LB.(4kg)MAXIMUM
- 4.MATERIAL:
HOUSING: GLASS FILLED THERMOPLASTIC,NATURAL,UL 94V-0
CONTACT: PHOSPHOR BRONZE
SHELL :NICKELOVER CU PLATED
BOARD LOCK : ZINC ALLOY,TIN PLATED
- 5.MARKER ▼ MUST CONTROL BY QC

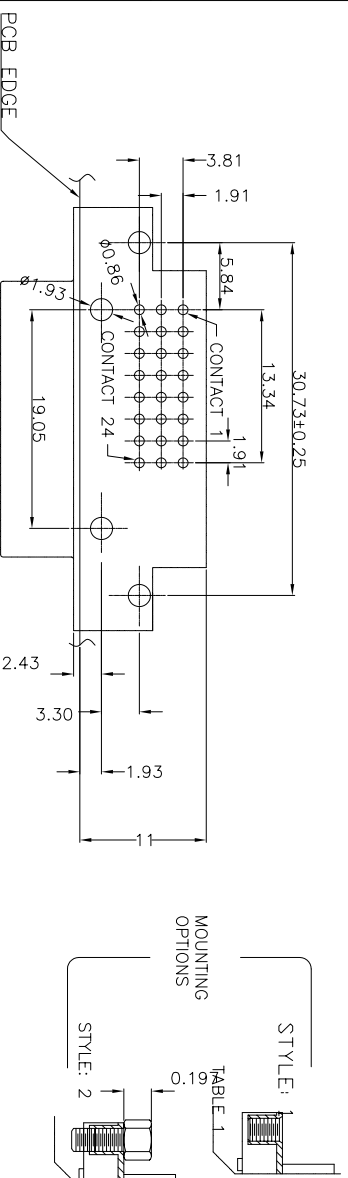

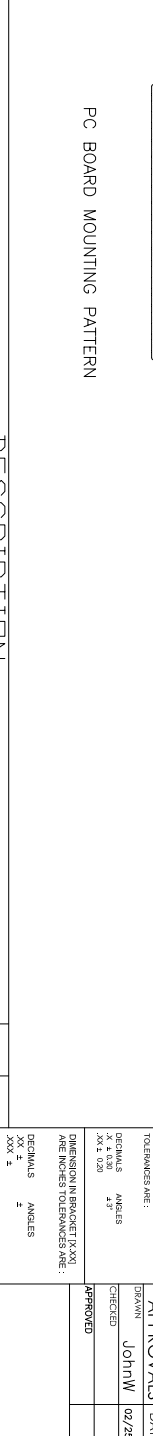PCB EDGE		DIMENSIONS AND TOLERANCES		APPROVALS		DATE		E-GREEN ENTERPRISE CO., LTD.	
		TOLERANCES ARE:		DRAWN JohnW		02/25/04			
		DECIMALS XX ± .020		CHECKED					
		ANGLES 1°		APPROVED					
DIMENSION IN BRACKET (X.XX) ALL DIMENSIONS TOLERANCES ARE:									
DECIMALS XX ± ANGLES XX ±									
DO NOT SCALE DRAWING									
SIZE		SCALE :		DRAWING NO.		REV.			
/		/		/		B			
ID NO. XXXXXXXXXX				SHEET 1 OF 1					