

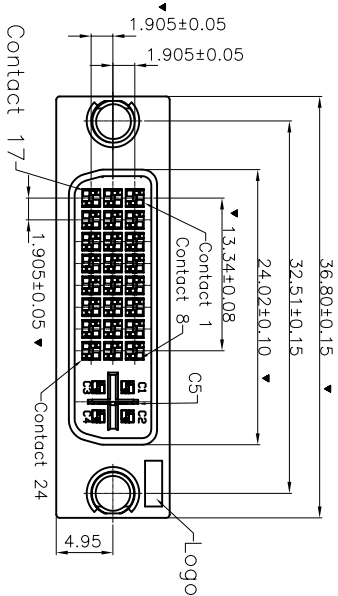


PART NO.	SEE TABLE 1
----------	-------------

REVISIONS		
LTR	DESCRIPTION	DRAWING DATE
B	Initial Release for Manufacture	johnw 02/25/04



001-01-00105/06/07	GRAY					
001-01-00102/03/04	WHITE	3.30	7.50	4.50	4.50	FOR CABLE
001-01-00109/10/11	BLACK					
001-01-00106/07/08	GRAY					
001-01-00103/04/05	WHITE		0	2.60	2.60	FOR PCB W/O POS.
001-01-00100/01/02	BLACK					
001-01-00097/98/99	GRAY					
001-01-00094/95/96	WHITE	3.30	2.60	2.60	2.60	FOR PCB
001-01-00091/92/93	BLACK					
THE DIFFERENCE PART NO FOR PLATED COLOR FOR THE PART NO. PLASTIC						
		DIM A	DIM B	DIM C	DIM D	NOTE

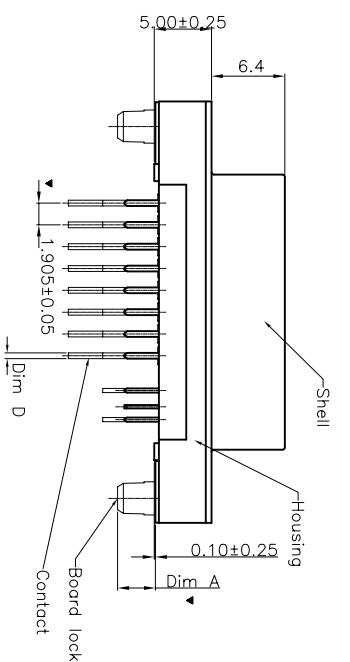

NOTES:

1. ENVIRONMENTAL: TEMPERATURE RANGE -20° TO $+85^{\circ}$.

2. ELECTRICAL:

RATED: 1.5A @ 40V AC (ms)

CONTACT RESISTANCE: 20 MILLIOHMS MAXIMUM

INSULATION RESISTANCE: 1000 MEGOHMS MINIMUM

DIELECTRIC WITHSTANDING VOLTAGE:500V AC (ms)

3. MECHANICAL:

MATING FORCE: 10 LB.(4.5kg) MAXIMUM

UNMATING FORCE: 2.2LB.(1kg) MINIMUM,8.8LB.(4kg)MAXIMUM

4. MATERIALS:



HOUSING: GLASS FILLED THERMOPLASTIC,NATURAL,UL 94V-0

CONTACT: PHOSPHOR BRONZE

SHELL :NICKRELOVER CU PLATED

BOARD LOCK : ZINC ALLOY,TIN P

5.MARKER ▼ MUST CONTROL BY QC

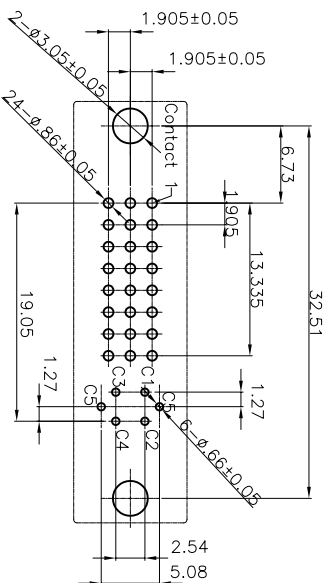

PC BOARD MOUNTING PATTERN

COMPONENT SIDE

DESCRIPTION

Q'TY	UNIT
------	------

DO NOT SCALE DRAWING

ID NO.	XXXXXXXXXXXX
--------	--------------

SHEET 1 OF 1

11

DIMENSIONS ARE IN MILLIMETERS	
TOLERANCES ARE:	
APPROVALS	DATE
JOHN W. DRAVIN	02/25/04

E-GREEN ENTERPRISE CO., LTD.

	DIMENSIONS	ANGLES	CHECKED		DVI CONNECTOR INTEGRATED 24+5 SOCKET VERTICAL TYPE
	X: 4 0.30	4.3°			
	.004 0.20				
	APPROVED				

DECIMALS	ANGLES	SIZE	SCALE :	DRAWING NO.	REV.
					P

--	--	--	--

DO NOT SCALE DRAWING	
ID NO.	XXXXXXXXXX
	SHEET 1 OF 1