
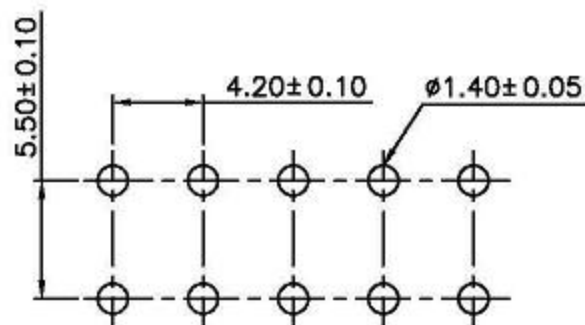
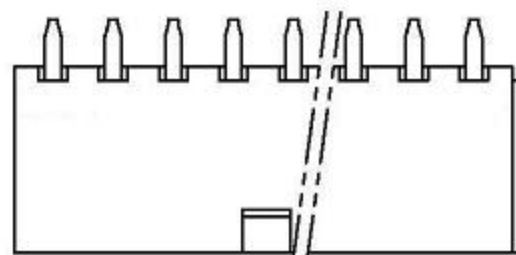



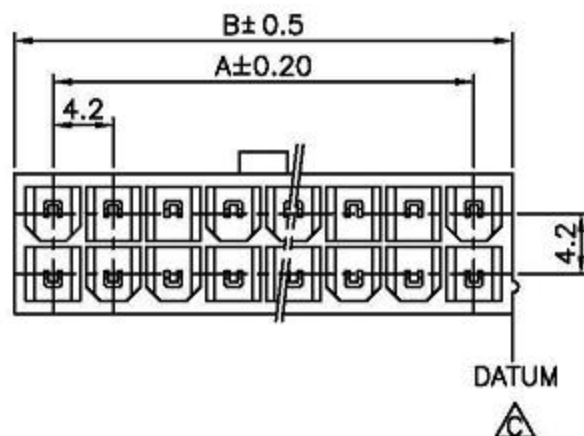

P C B LAYOUT

**WAFER**

Part No: PEC 4200A1-WS

Poles: 2*1~2*12

Material: Post: Brass, Tin/Plated

Base: Nylon 66, UL94V-2

Q'ty: 500, 1000 pcs/bag

SPECIFICATIONS

Voltage: 600V

Current: 9A

Contact Resistance: 10mΩ Max.

Dielectric Withstanding Voltage: 1500V

Insulation Resistance: 1000MΩ Min.

Temperature: -40°C ~ +105°C

Part No.	Dimension in.(mm)		Material
	A	B	
PEC 4200A1-WS-2x1		0.213(5.4)	Post:Brass Tin/Plated Base:Nylon 66 UL94V-2
PEC 4200A1-WS-2x2	0.165(4.2)	0.378(9.6)	
PEC 4200A1-WS-2x3	0.331(8.4)	0.543(13.8)	
PEC 4200A1-WS-2x4	0.496(12.6)	0.717(18.2)	
PEC 4200A1-WS-2x5	0.661(16.8)	0.874(22.2)	
PEC 4200A1-WS-2x6	0.827(21.0)	1.039(26.4)	
PEC 4200A1-WS-2x7	0.992(25.2)	1.205(30.6)	
PEC 4200A1-WS-2x8	1.160(29.4)	1.370(34.8)	
PEC 4200A1-WS-2x9	1.323(33.6)	1.535(39.0)	
PEC 4200A1-WS-2x10	1.488(37.8)	1.701(43.2)	
PEC 4200A1-WS-2x11	1.654(42.0)	1.866(47.4)	
PEC 4200A1-WS-2x12	1.819(46.2)	2.047(52.0)	

ECN NO.:

FILE PATH: E:\CLIPART

E-GREEN ENTERPRISE CO., LTD.

SCALE 2 : 1

SHEET

1 OF 1

DRAWN BY: H.T.K. 7/9/98

UNIT mm

REV D

D ADD DATUM

05.10.03

APPROVED BY:

DRAW NO.

C ADD DATUM

12.10.02

GENERAL TOLERANCE:

PEC 4200A1-WS

B 標示錯誤

06.05.99

ANGLE:

DIM:

A NEW RELEASE

7/9/98

TITLE:
Mini-fit high current
High density power
Connector

REV REVISION RECORD

DATE