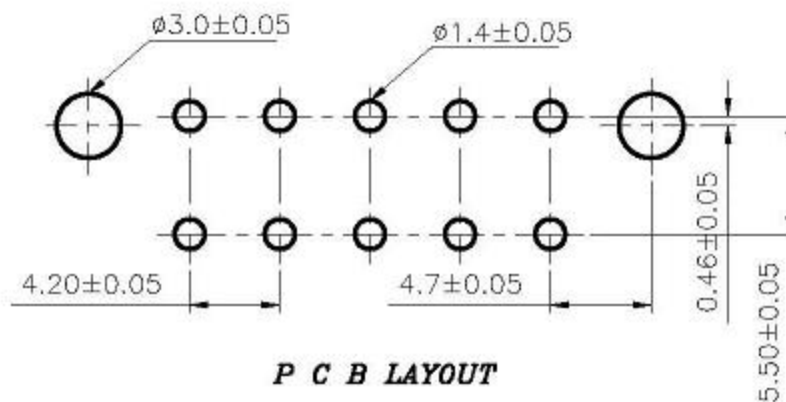
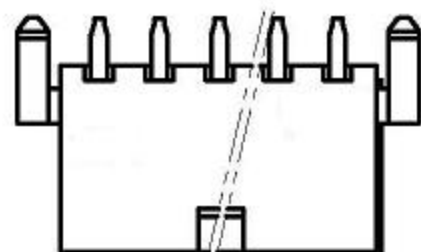




CONNECTOR

Part No: PEC 4200A2-WS

Poles: 2*1~2*12

Material: Post: Brass, Tin/Plated

Base: Nylon 66, UL94V-2

Q'ty: 500, 1000 pcs/bag

SPECIFICATIONS

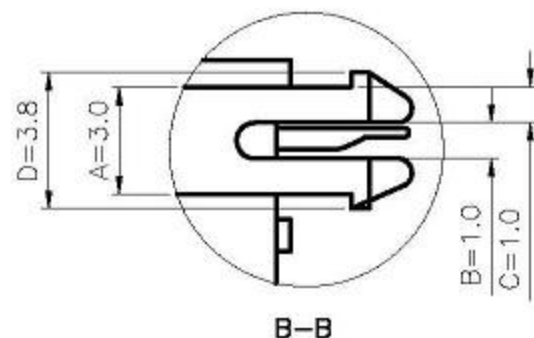
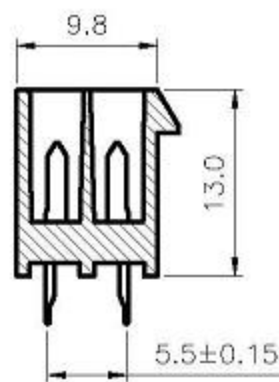
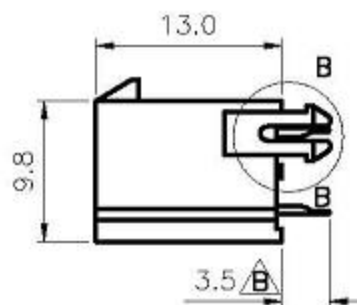
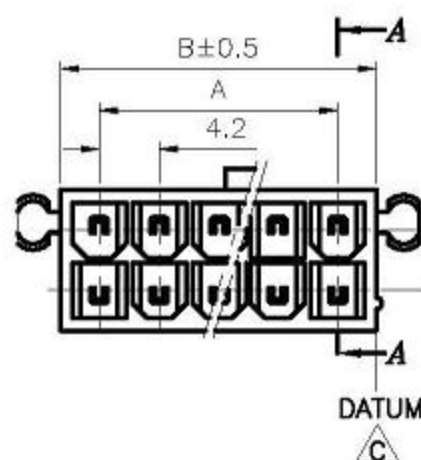
Voltage: 600V

Current: 9A

Contact Resistance: 10mΩ Max.

Dielectric Withstanding Voltage: 1500V

Insulation Resistance: 1000MΩ Min.

Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ 

Part No.	Dimension in.(mm)		Material
	A	B	
PEC 4200A2-WS-2*1		0.213(5.4)	Post: Brass Tin/Plated Base: Nylon 66 UL94V-2
PEC 4200A2-WS-2*2	0.165(4.2)	0.378(9.6)	
PEC 4200A2-WS-2*3	0.331(8.4)	0.543(13.8)	
PEC 4200A2-WS-2*4	0.496(12.6)	0.717(18.2)	
PEC 4200A2-WS-2*5	0.661(16.8)	0.874(22.2)	
PEC 4200A2-WS-2*6	0.827(21.0)	1.039(26.4)	
PEC 4200A2-WS-2*7	0.992(25.2)	1.205(30.6)	
PEC 4200A2-WS-2*8	1.160(29.4)	1.370(34.8)	
PEC 4200A2-WS-2*9	1.323(33.6)	1.535(39.0)	
PEC 4200A2-WS-2*10	1.488(37.8)	1.701(43.2)	
PEC 4200A2-WS-2*11	1.654(42.0)	1.866(47.4)	
PEC 4200A2-WS-2*12	1.819(46.2)	2.047(52.0)	

ECN NO.:

FILE PATH: E:\CLIPART

E-GREEN ENTERPRISE CO., LTD.

SCALE 2 : 1

SHEET 1 OF 1

DRAWN BY: H.T.K. 7/9/98

UNIT mm REV C

APPROVED BY:

DRAW NO.

GENERAL TOLERANCE:

PEC 4200A2-WS

C ADD DATUM 91.12.30

B 標示錯誤 88/6/5

A NEW RELEASE 7/9/98

REV REVISION RECORD DATE

ANGLE:

DIM:

 $\pm 2^{\circ}$ X.X ± 0.25 X.XX ± 0.15 X.XXX ± 0.05

TITLE:

Pitch 4.20mm Straight
type High Current High
Density Power Connector