
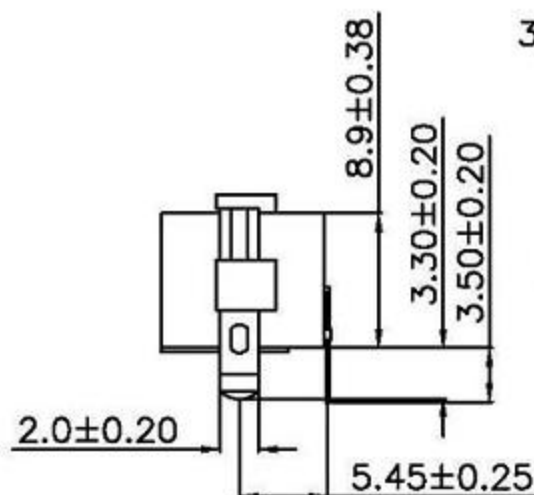
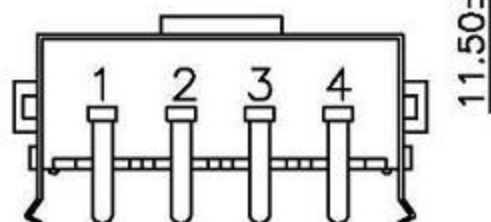
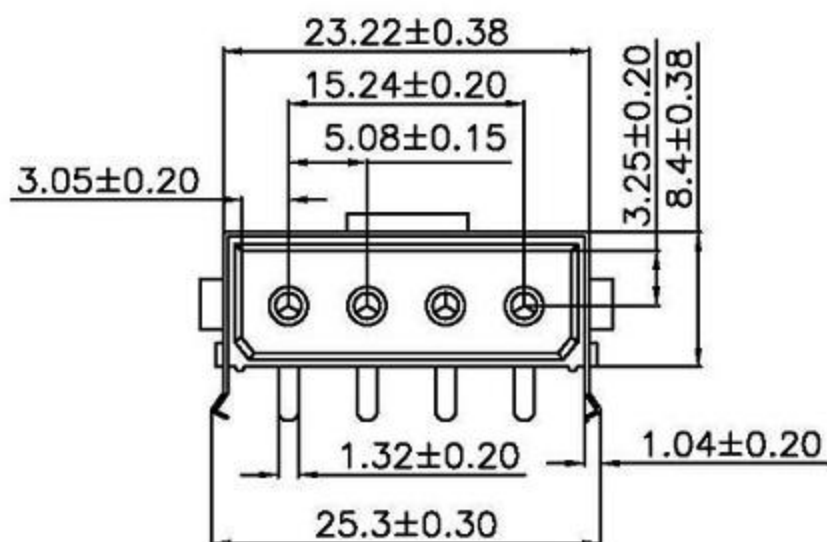


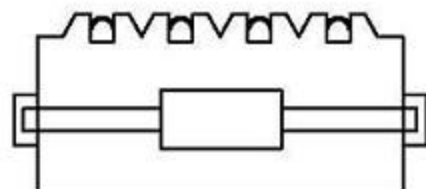

NOTES:

1.MATERIAL:

HOUSING:PA6T ,UL94V-0

CONTACT:BRASS

2.FINISH:

CONTACT:TIN PLATED

3.SPECIFICATIONS:

ELECTRICAL:

CONTACT CURRENT RATING:8.0 AMP

DIELECTRIC WITHSTANDING VOLTAGE:250VAC MIN


INSULATION RESISTANCE:5000MΩ MIN

CONTACT RESISTANCE:20mΩ MAX

ENVIRONMENTAL:

OPERATING TEMPERATURE:-55°C~+85°C

P/N:1770402371

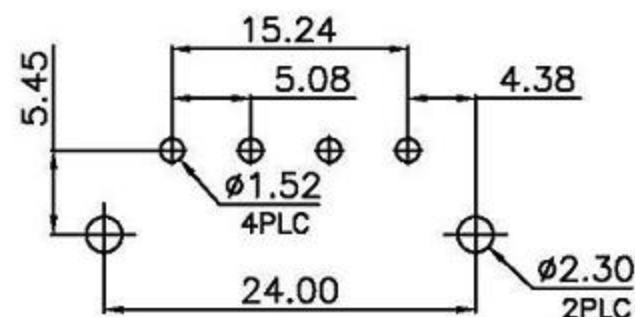

RECOMMENDED PCB LAYOUT

E-GREEN

ENTERPRISE CO., LTD.

DRAWN JANNY WANG

UNIT mm

CHKD WAYNE LI

SCALE 1:1

APPD BJ LIN

DATE 2004.05.04

TOLERANCES:

0 PLC ±0.30
1 PLC ±0.20
2 PLC ±0.13
3 PLC ±0.050
ANGLES ±3°



NAME:

WAFER P=5.08mm
w/shield

DRAWING NO.

LS-WF-508-02

REVISION

O