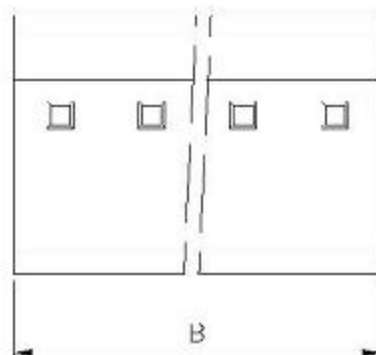


**SPECIFICATIONS**


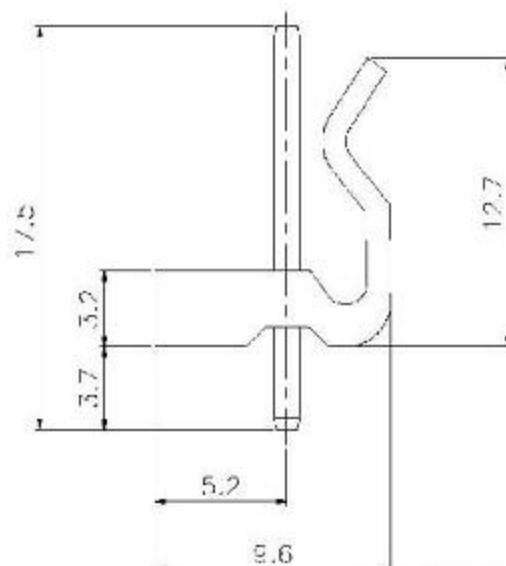
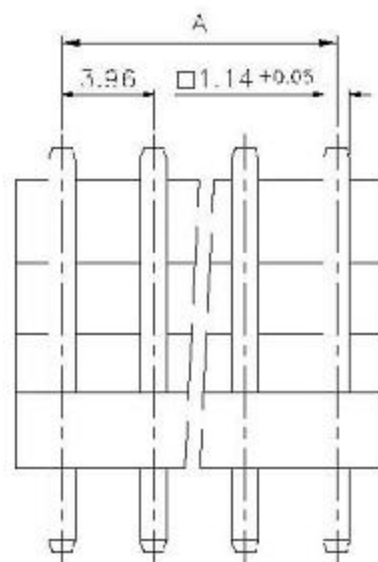
- * Voltage rating: AC,DC, 250V
- * Current rating: AC,DC, 7A
- * Withstand voltage: AC 1500V/min
- * Insulation resistance: 1000M Ω max.
- * Temperature range: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- * Applicable PC board thickness: 1.6mm
- * Contact resistance: Initial value/10m Ω max.
After environmental
Testing/20m Ω max.

Solder—Standard:

可焊性規格: 250~255度, 時間 $2.5\pm 0.5\text{Sec}$, 5 角占面積90%以上
詳細參數見附件<RoHS零件耐焊性標準>.

Resistance to Soldering Heat:

Appearance :no damage
DIPPING TIM:10 $\pm 0.5\text{Sec}$. Temperature: $270\pm 2^{\circ}\text{C}$
NO DEFORMATION OF THE OUTLINE OR
THE TERMINAL CONTACT PIN,THE ELECTRICAL
AND MECHANICAL CHARACTERISTIC SATISFIED
詳細參數見附件<RoHS零件耐焊性標準>.

**P C B LAYOUT**

Poles	Dimension in.(mm)		Material
	A	B	
2	0.156(3.96)	0.312(7.92)	Nylon 66 UL94V-2
3	0.312(7.92)	0.468(11.88)	
4	0.468(11.88)	0.624(15.84)	
5	0.624(15.84)	0.780(19.80)	
6	0.780(19.80)	0.935(23.76)	
7	0.935(23.76)	1.091(27.72)	
8	1.091(27.72)	1.247(31.68)	
9	1.247(31.68)	1.403(35.64)	
10	1.403(35.64)	1.559(39.60)	
11	1.559(39.60)	1.715(43.56)	Post: Brass Tin/Plated
12	1.715(43.56)	1.871(47.52)	
13	1.871(47.52)	2.027(51.48)	
14	2.027(51.48)	2.183(55.44)	
15	2.183(55.44)	2.339(59.40)	
16	2.339(59.40)	2.494(63.36)	
17	2.494(63.36)	2.650(67.32)	
18	2.650(67.32)	2.806(71.28)	
19	2.806(71.28)	2.962(75.24)	
20	2.962(75.24)	3.118(79.20)	

ECN NO.			E-GREEN ENTERPRISE CO., LTD.							
FILE PATH: E:\CLIPART										
			SCALE		NONE		SHEET		1 OF 1	
			DRAWN BY: Kevin Wang				UNIT	mm	REV	A
			APPROVED BY:				DRAW NO.			
			GENERAL TOLERANCE:				PEC 3961-WS-XX-LF			
			ANGLE:		DIM:		TITLE:			
A	NEW RELEASE	04.12.04	±2°		X ±0.5		Pitch 3.96mm Straight type			
REV	REVISION RECORD	DATE			XX ±0.25		P.C.Board Connector			
					XXX ±0.16					