
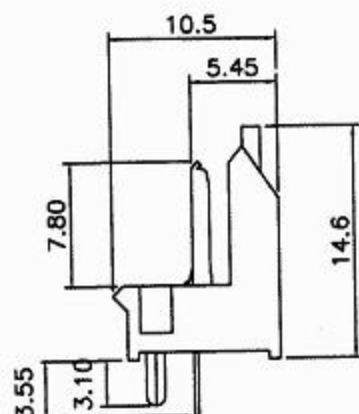


12 11 10 9 8 7 6 5 4 3 2 1

12 POLES PROFILE

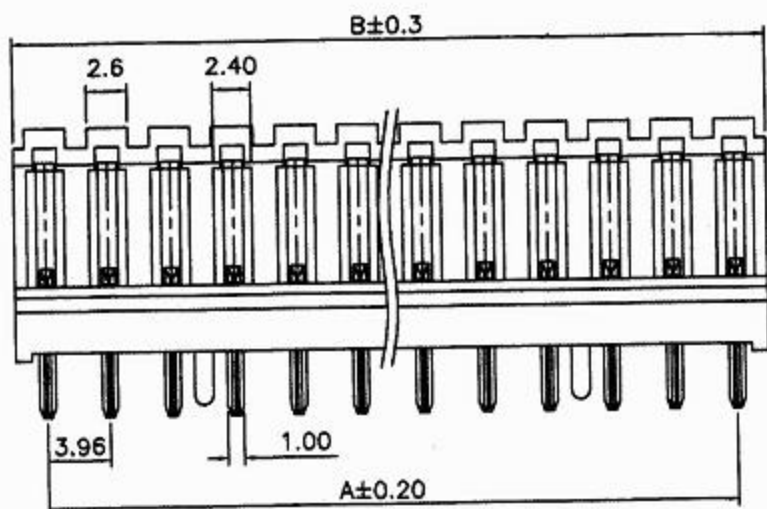

CONNECTOR

Part No: PEC 3964-WS-12-S-LF

Poles: 12

Material: Post: Brass, Tin/Plated

Base: Nylon 66, UL94V-0

SPECIFICATIONS

Voltage rating: AC,DC, 250V

Current rating: AC,DC, 7A

Withstand voltage: AC 1000V/min

Insulation resistance: 1000M Ω max.

Temperature range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Withstand Temperature: 250°C Max.

Solder Temperature: 235°C as 3 sec.

Applicable PC board thickness: 1.6mm

Contact resistance: Initial value/10m Ω max

After environmental

Testing/20m Ω max.

Poles	Part No.	Dimension in.(mm)	
		A	B
12	PEC 3964-WS-S	12 1.71(43.56)	1.871(47.52)

ECN NO.:		E-GREEN ENTERPRISE CO., LTD.	
FILE PATH: E:\CLIPART			
		SCALE	2.5 : 1
		DRAWN BY:	CHRIS
		APPROVED BY:	
		GENERAL TOLERANCE:	
		ANGLE:	DIM:
			X. ± 0.5
			X.X ± 0.25
			X.XX ± 0.15
A	NEW RELEASE	20.10.05	
REV	REVISION	RECORD	DATE
		$\pm 2^{\circ}$	
		UNIT	mm
		REV	A
		DRAW NO.	
		PEC 3964-WS-12-S-LF	
		TITLE:	
			P.C.BOARD CONNECTOR

A

B

C

D

E

F