

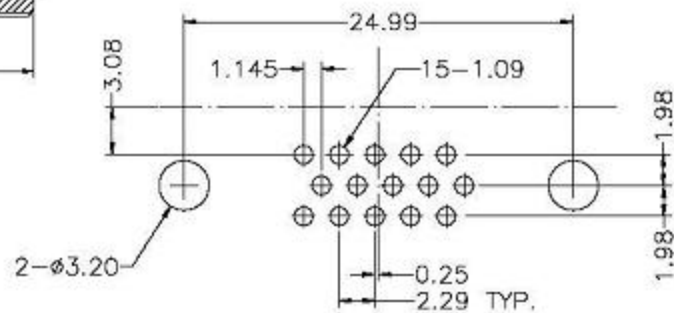

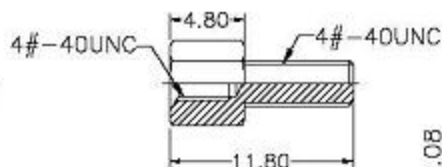
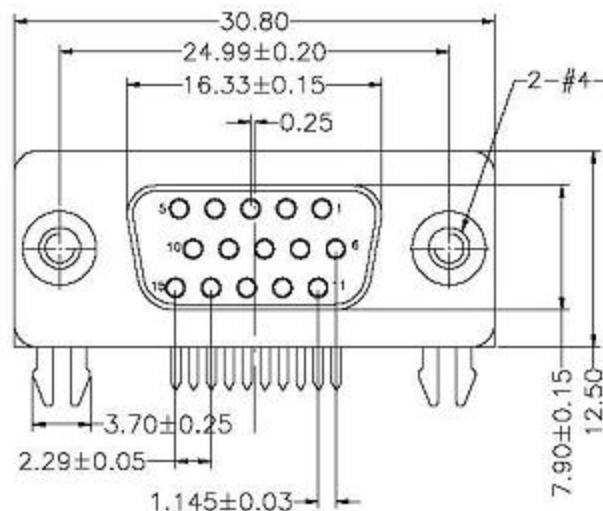


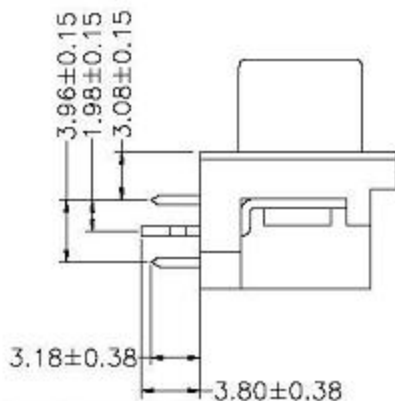

P.C.B. LAYOUT

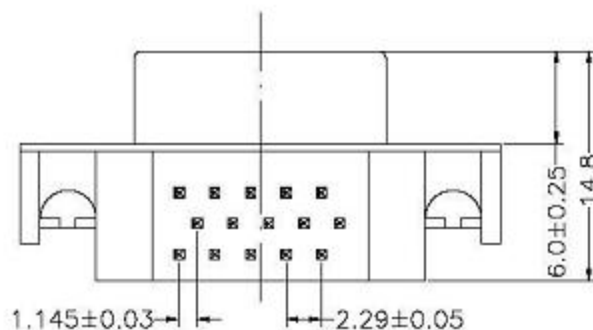

NOTES:

1.MATERIAL:

- 1.1 Insulator:PBT+30%Glass Fiber (UL94V-0)
- 1.2 Contact: Brass
- 1.3 Contact Plated: Gold or Tin Plated
- 1.4 Shell: Steel, Nickle Plated

2.SPECIFICATION:

- 2.1 Current Rate: 5 Amps
- 2.2 Insulator Resistance: 5000Ω Min. at 500V DC
- 2.3 Dielectric Strength: 1000V Per minute
- 2.4 Operation Temperature: -55°C to+105°C

Series No.	Plating	Insulator Color
A03-3042-0	GOLD OR TIN PLATED	Black
A03-3042-6	GOLD OR TIN PLATED	Blue

DIMENSIONS TOLERANCE

METRIC

.0= ±.5
.00= ±.30
.000= ±.XXX
.0000= ±.
ANG.= ± 2'

單位(UNITS)	mm
數量(QTY)	N/A
材料(MTL)	SEE NOTE
處理(FINISH)	SEE NOTE
繪圖(DRAW)	邵劍鋒
設計(DE'N)	
審核(CHE'K)	
核准(APP'D)	

鏡榮企業有限公司

E-GREEN ENTERPRISE CO., LTD.

圖名(NAME)

15P三排3.08母叉鉗附半金淺蓋(縮9P)

料號(PART NUMBER)

A03-3042-6

圖號(DRAW NUMBER)

RA0330426

圖檔(FILE NAME, DWG)

E:GCT/A/03/3

比例(SCALE)

1/1

圖紙(SHEET)

A4

頁次(PAGE)

1

版次(REV.)

A

REV.	NOTES	DATE
A	RELEASED	2005/2/16