



P.C.E. LAYOUT

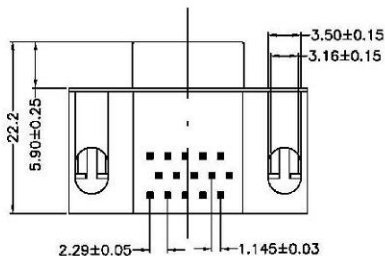


NOTES:

1. MATERIAL

- 1.1 Insulator:PBT+30%Glass Fiber
(UL94V-0)
1.2 Contact:Brass
1.3 Contact Plated:Gold or Tin Plated
1.4 Shell:Steel,Nickel Plated
1.5 Screw: Brass ,Nickel Plated

2. SPECIFICATION

- 2.1 Current Rate:5 Amps
2.2 Insulator Resistance:5000MW Min. at 500V DC
2.3 Dielectric Strength:1000V Per minute
2.4 Operation Temperature:-55°C to +105°C



??(UNITS)	TEXT	E-GREEN ENTERPRISE CO., LTD
??(OT'Y)	N/A	
??(MT'L)	SEE NOTE	
??(FINISH)	SEE NOTE	
??(DRAW)	???	??(NAME)
??(DE'N)		HDD15P8.89?????? (79)
??(CH'K)		??(PART NUMBER) A03-B041-8
		??(DRAW NUMBER) R3Q3B418
		??(FILE NAME .DWG) E-GC/A/03
??(APP'D)	?? (SCALE) 1/1	A4?? (SHEET) 1
		REV. A