
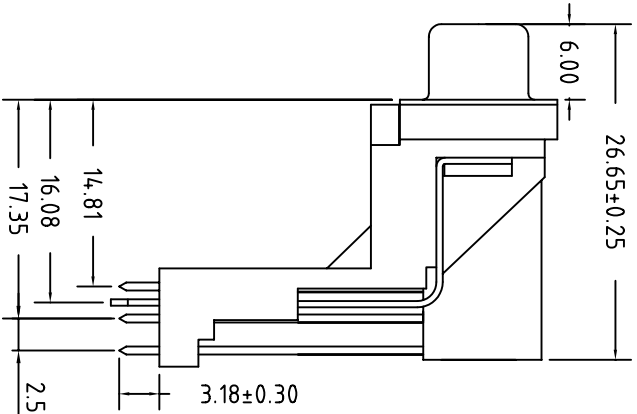



REV.	NOTES	DATE
A	RELEASED	29/03/2003

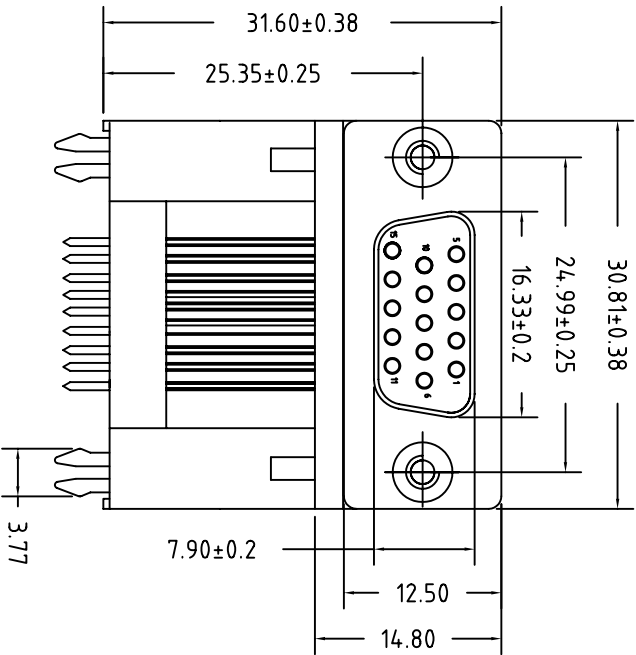

MATERIAL:
HOUSING:PC99 322C(GREEN)
CONTACT: BRASS
BOARD LOCK: BRASS
SQUARE RIVET: BRASS
SHELL: SPCC
ELECTRICAL CHARACTERISTICS:
RATED CURRENT:5A
RATED VOLTAGE: 30V DG
INSULATION RESISTANCE:1000M OHMS MIN.AT 500V

CONTACT RESISTANCE: 30M OHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR
ONE MINUTE
OPERATING TEMPERATURE: -55

FINSH:
SHELL: NICKEL PLATED
CONTACT GOLD PLATED IN CONTACT AREA TIN
PLATED IN SOLDER AREA.
BOARD LOCK: TIN PLATED
SQUARE RIVET: NICKEL PLATED

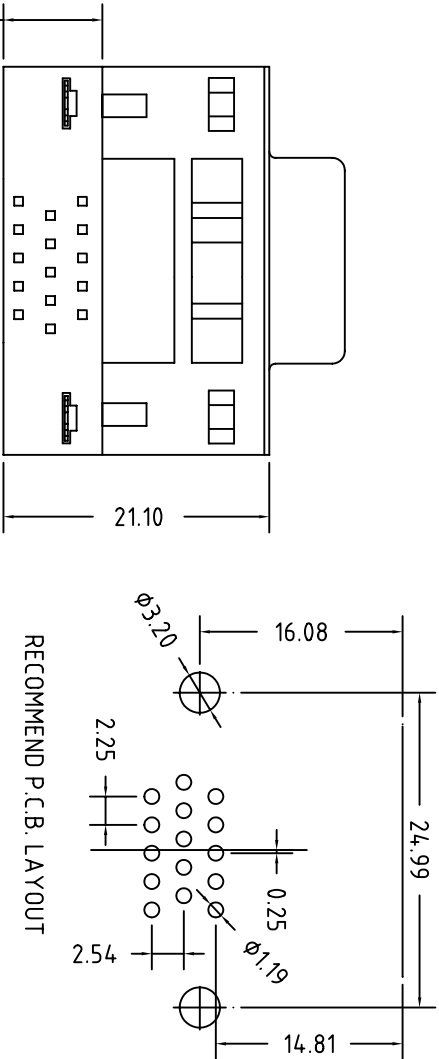

RECOMMEND P.C.B. LAYOUT

DIMENSIONS TOLERANCE

METRIC
0= ± .25
.00= ± .20
.000= ± .XXX
.0000= ± .2
ANG= ± 2°

單位(UNITS)	mm	E-GREEN ENTERPRISE CO., LTD.			
數量(QTY)	N/A				
材料(MTL)	SEE NOTE				
處理(FINISH)	SEE NOTE				
繪圖(DRAW)		圖名(NAME) 三排15母高腳叉鉚半金蓋二魚叉661C			
設計(DES)					
審核(CHK)					
核准(APP)					
料號(PART NUMBER)		A03-H012-6901			
圖號(DRAW NUMBER)		RA03150H25			
圖檔(FIGLE NAME .DWG)		D:\CCB\CPT			
比例(SCALE)	1/1	圖紙(SIZE)	A4	頁次(SHEET)	1
		版本(REV.)	A		