
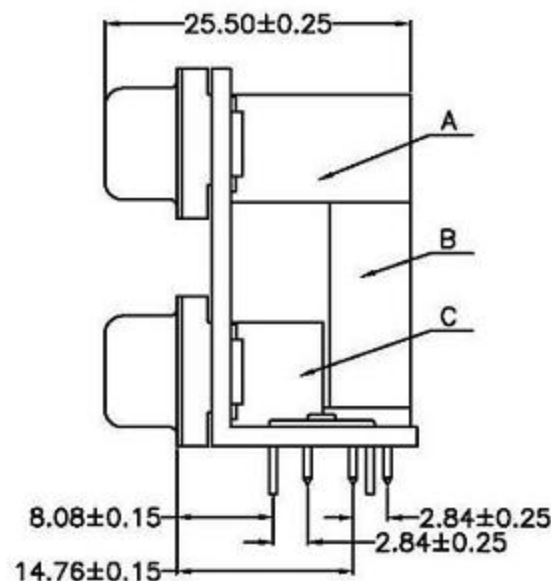


REV.	NOTES	DATE
A	RELEASED	2005/07/11

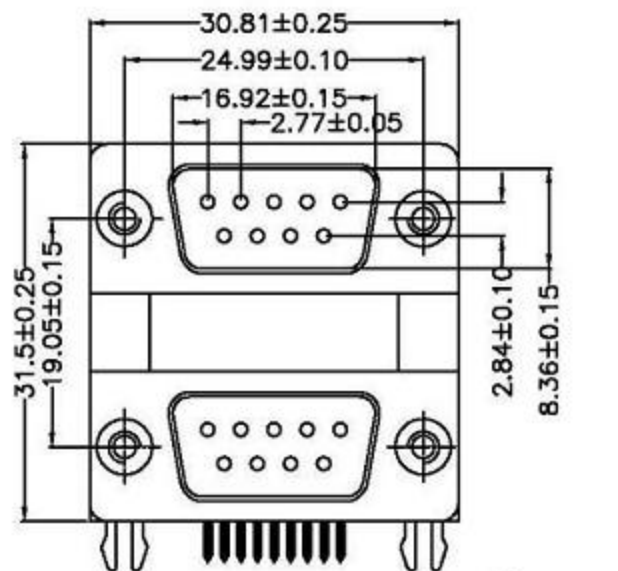



MATERIAL:

HOUSING:P.B.T
CONTACT: COPPER ALLOY, GOLD PLATED IN
CONTACT AREA TIN PLATED IN SOLDER AREA.
BOARD LOCK: COPPER ALLOY, TIN PLATED
SQUARE RIVET: COPPER ALLOY, NICKEL PLATED
SHELL: STEEL,NICKEL PLATED
SHELL BRACKET:BRASS ,NICKEL PLATED

ELECTRICAL CHARACTERISTICS:

RATED CURRENT:5A
RATED VOLTAGE: 300V DG
INSULATION RESISTANCE:1000M OHMS MIN.AT 500V DC
CONTACT RESISTANCE: 30M OHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR
ONE MINUTE
OPERATING TEMPERATURE: -55°C TO+105°C

PART NO.	A COLOR	B COLOR	C COLOR
A20-9191-1258L	BLACK	GREEN	BLACK
A20-9191-1208LW	BLACK	BLACK	BLACK
A20+9191-1258L(無毒)	GREEN	BLACK	GREEN
A20-9191-1268L	BLUE/322C	BLACK	BLUE/322C
A02+9191-1268L(無毒)	BLUE/322C	BLUE/322C	BLUE/322C

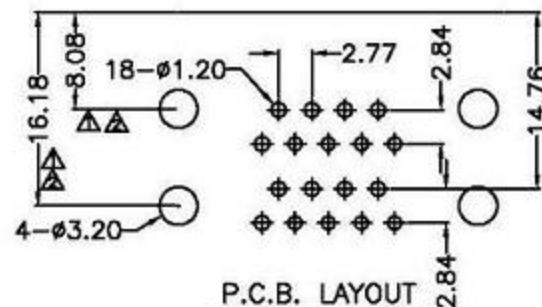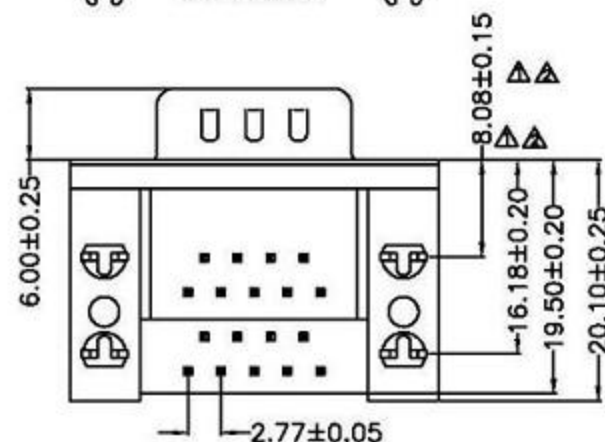

DIMENSIONS TOLERANCE

METRIC

.0= ±.20
.00= ±.10
.000= ±.XXX
.0000= ±
ANG.= ±2°

單位(UNITS)	mm
數量(QTY)	N/A
材料(MTL)	SEE NOTE
處理(FINISH)	SEE NOTE

繪圖(DRAW)	張保永
設計(DE'N)	
審核(CH'K)	
核准(APP'D)	

E-GREEN ENTERPRISE CO.,LTD.

圖名(NAME)

9P公雙層又鉚半金線 19.05

料號(PART NUMBER)	A20-9191-1258L
圖號(DRAW NUMBER)	RA2091911258L
圖檔(FILE NAME .DWG)	E:GCT/A/20
比例(SCALE)	1/1
圖紙(SHEET)	A4
頁次	1
版次(REV.)	A