


DIMENSIONS				
CONTACTS	A	B	C	D
BH-06	15.06	5.06	3.2	2.5
BH-08	17.90	7.62	3.2	
BH-10	20.14	10.16	3.2	
BH-12	22.67	12.70	3.2	
BH-14	25.22	15.24	3.2	
BH-16	27.60	17.78	3.2	
BH-20	32.68	22.86	3.2	
BH-24	38.32	27.94	3.2	4.5
BH-26	40.50	30.48	3.2	
BH-30	46.00	35.66	3.2	
BH-34	50.70	40.64	3.2	
BH-40	58.30	48.26	3.2	
BH-44	63.78	53.34	3.2	
BH-50	71.05	60.96	3.2	
BH-60	84.10	73.66	3.2	
BH-64	89.25	78.74	3.2	

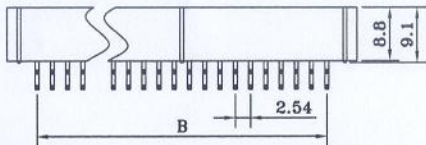

MATERIALS:

INSULATOR: P.B.T. 30% GLASS FIBER, UL94V-0
 COLOR: BLACK, YELLOW, RED, BLUE, GREEN, GREY, WHITE, ORANGE
 CONTACTS: BRASS OR PHOSPHOR BRONZE,
 GOLD FLASH OVER NICKEL
 ELECTRICAL:
 CURRENT RATING: 1AMP.
 INSULATION RESISTANCE: 1000M Ω MIN.
 DIELECTRIC WITHSTANDING: 500VAC
 OPERATING TEMPERATURE: -55°C ~ +105°C

UNSPECIFIED TOLERANCE		X	.X	.XX	ITEM	MATERIAL	Q'TY	TOOLING NO.	DRAWING CODE	DRAWING NO.			
		± 0.2	± 0.2	± 0.2	BH	PBT	0	0	CTS-11	BH-00018			
REVISION	DATE	DESCRIPTION	DRAWN BY	LIN	2003/08/28	BH-XXR-N			E-GREEN ENTERPRISE CO.,LTD.		SCALE		EDITION
			DESIGNED BY								UNIT	m.m	A2
			APPROVAL BY										