

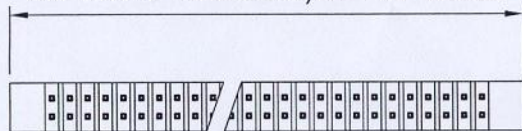


$2.0 \times \text{No. of Contacts} / 2 + 7.3 \pm 0.20$



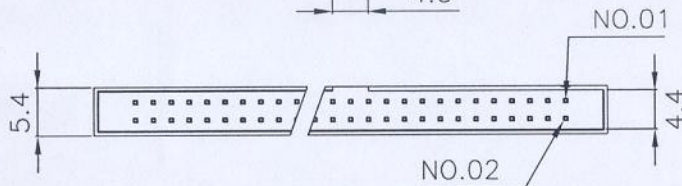


$2.0 \times \text{No. of Contacts} / 2 - 2.0 \pm 0.20$

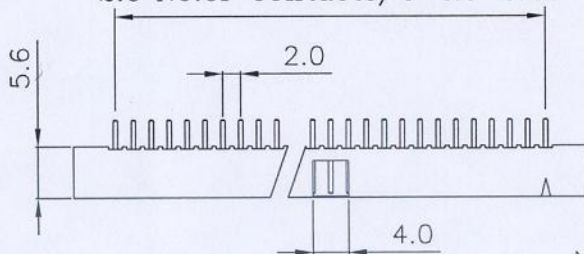

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: AC 500 V
 Operating Temperature: $-40^{\circ} \sim +105^{\circ} \text{C}$
 Contact Material: Copper Alloy
 Insulator Material: Polyester, UL 94V-0
 Standard: Nylon-6T

Finish: Gold Plated
 Standard: Gold Flash all over
 MAX PROCESSING TEMP: 260D FOR 10 SEC.



PIN	A		
01	2.8		
02			

UNSPECIFIED TOLERANCE		X	.X	.XX	ITEM	MATERIAL	Q'TY	TOOLING NO.	DRAWING CODE	DRAWING NO.			
		±0.2	±0.2	± 0.2	BA	NYLON-6T	0	0	CTS-04	BA-00012			
REVISION	DATE	DESCRIPTION	DRAWN BY	LIN	2003/06/10	BA-XXS-N			E-GREEN		SCALE		EDITION
			DESIGNED BY						ENTERPRISE CO., LTD.		UNIT	m.m	A2
			APPROVAL BY										