


2.0*No.of Contacts/2+7.3 ±0.2

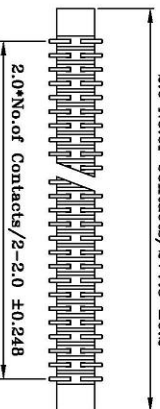

Current Rating: 1 Amps
 Insulator Resistance: 5000 Megohms min
 Dielectric Withstanding: AC 500 V
 Operating Temperature: - 40° ~ +105° C
 Max Processing Temp: 230°C for 60 seconds
 Contact Material: Copper Alloy
 Insulator Material: Polysic; UL 94V-0
 Standard:Nylon-6T

Finish: Gold Plated


5.6



4.0




2.0

5.4

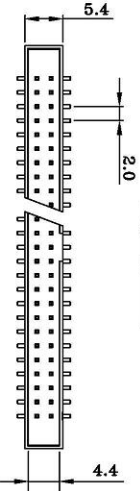

4.4

(B) 6.7



PIN	A	B
01	7.6	6.7
02		

UNSPECIFIED TOLERANCE	X	.X	.XX	ITEM	MATERIAL	Q'TY	TOOLING NO.	DRAWING CODE	DRAWING NO.
	±0.2	±0.2	± 0.2	BA	NYLON-6T	0	0	CTS-04	BA-00010
REVISION	DATE	DESCRIPTION	DRAWN BY	LIN	2003/06/10	BA-XXD			
		DESIGNED BY	APPROVAL BY			E-GREEN			
						ENTERPRISE CO., LTD.			
						UNIT	m.m	EDITION	A2