
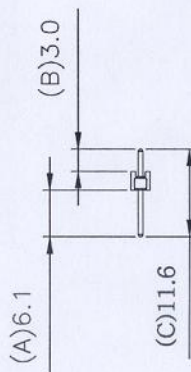



Recommended P.C. Board
Hole Layout

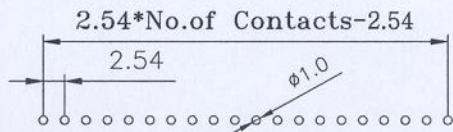

Current Rating: 3 Amps
Insulator Resistance: 5000 Megohms min
Dielectric Withstanding: AC 1000 V
Operating Temperature: - 40° ~ +105° C
Contact Material: Copper Alloy or Phosphor Bronze
Insulator Material: Polyester, UL 94V-0
Standard: PBT

Finish: Gold Plated or Duplex Plated
Standard: Gold Flash all over
Note:
Duplex Plating: Gold Plated on contact area,
Tin on solder area

MAX PROCESSING TEMP: 190D FOR 10 SEC.



PIN	A	B	C
01	6.1	3.0	11.6
02			

UNSPECIFIED TOLERANCE				ITEM	MATERIAL	Q'TY	TOOLING NO.	DRAWING CODE	DRAWING NO.	
	X	.X	.XX	PH	PBT	0	0	CTS-04	PH-00011	
REVISION	DATE	DESCRIPTION	DRAWN BY	LIN	2003/06/18	PH-1-XXS-N	E-GREEN ENTERPRISE CO., LTD.	SCALE	EDITION	
			DESIGNED BY					UNIT	m.m	
			APPROVAL BY						A2	