




MATERIALS:
 INSULATOR: P.B.T. 30% GLASS FIBER, UL94V-0
 CONTACTS: BRASS OR PHOSPHOR BRONZE,
 GOLD FLASH OVER NICKEL

ELECTRICAL:
 CURRENT RATING: 1AMP.
 INSULATION RESISTANCE: 1000M Ω MIN.
 DIELECTRIC WITHSTANDING: 500VAC
 OPERATING TEMPERATURE: -55°C ~ +105°C
 MAX PROCESSING TEMP: 190D FOR 10 SEC.

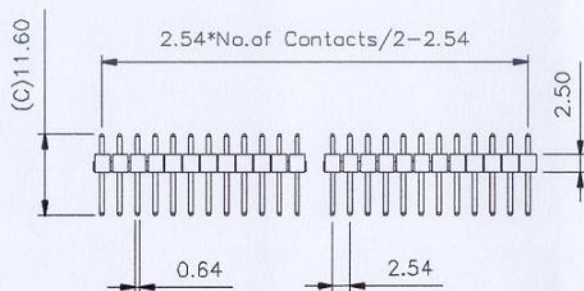

PIN	A	B	C
01	6.1	3.0	11.6
02			

UNSPECIFIED TOLERANCE	X	.X	.XX	ITEN	MATERIAL	Q'TY	TOOLING NO.	DRAWING CODE	DARWING NO.		
	±0.2	±0.2	±0.2		PBT	0	0	CTS-04	PH-00014		
REVISION	DATE	DESCRIPTION	DRAWN BY	JS	2002/04/24	PH-2-XXS-N	E-GREEN		SCALE	EDITION	
			DESIGNED BY				ENTERPRISE CO., LTD.		UNIT	m.m	A1
			APPROVAL BY								