

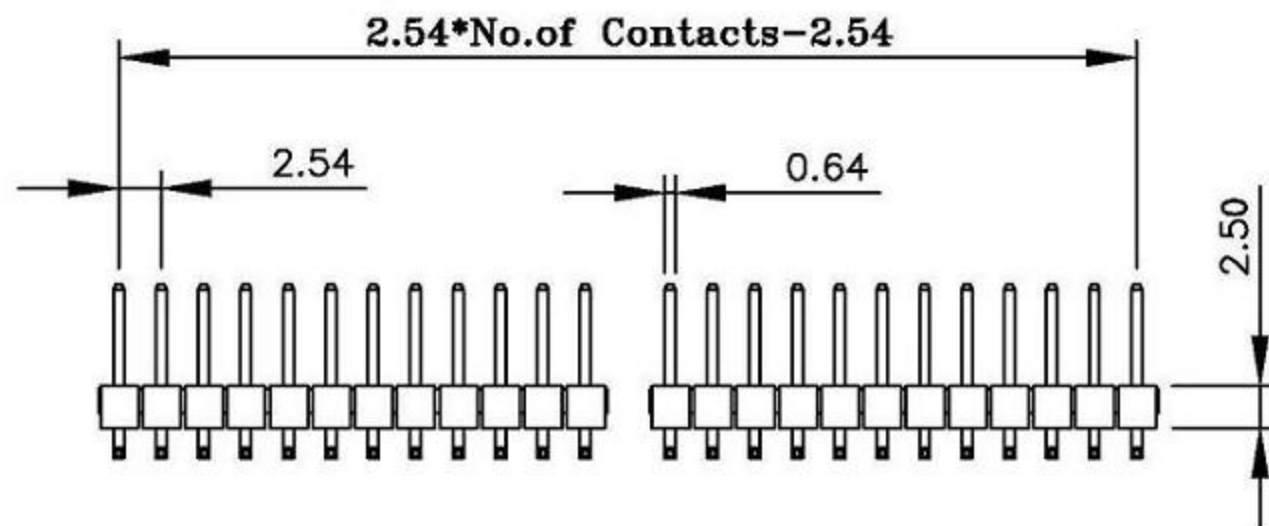



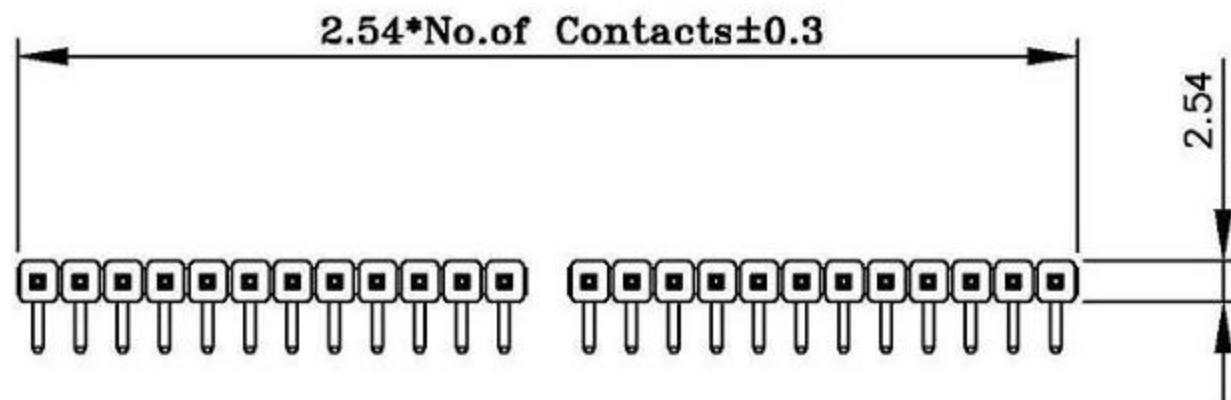


Recommended P.C. Board
Hole Layout

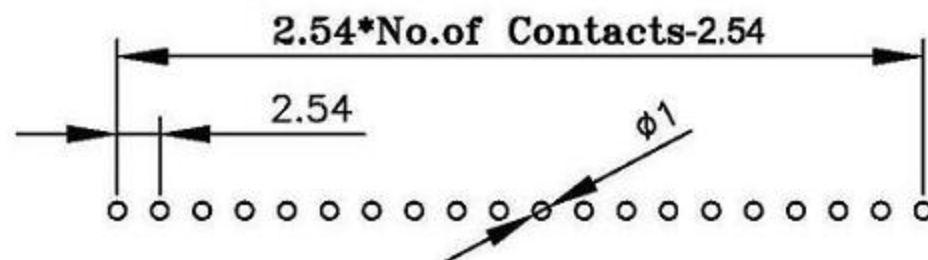

Current Rating: 3 Amps
Insulator Resistance: 5000 Megohms min
Dielectric Withstanding: AC 1000 V
Operating Temperature: - 40° ~ +105° C
Contact Material: Copper Alloy
Insulator Material: Polyester, UL 94V-0
Standard: PBT

Finish: Gold Plated or Duplex Plated
Standard: Gold Flash all over
Note:
Duplex Plating: Gold Plated on contact area,
Tin on solder area
MAX PROCESSING TEMP: 190D FOR 10 SEC.

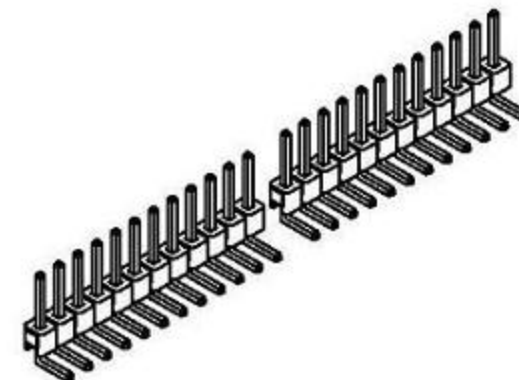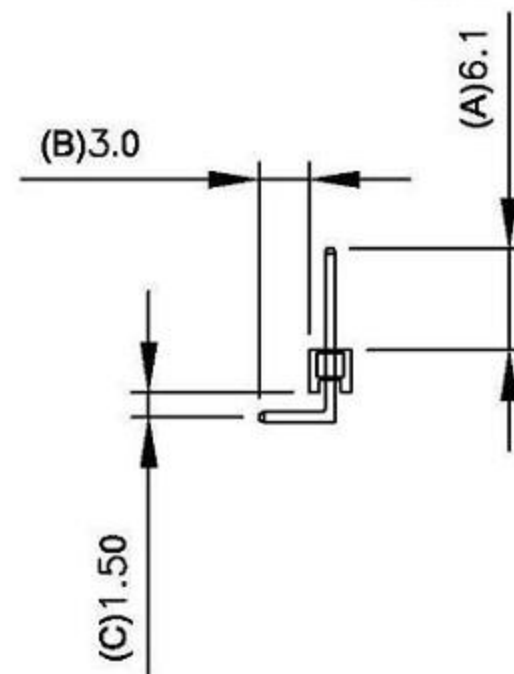

PIN	A	B	C
01	6.10	3.0	1.50
02			

UNSPECIFIED TOLERANCE		X	.X	.XX	ITEM	MATERIAL	Q'TY	TOOLING NO .	DRAWING CODE	DRAWING NO.			
		±0.2	±0.2	± 0.2	PH	PBT	0	0	CTS-04	PH-00010			
REVISION	DATE	DESCRIPTION	DRAWN BY	LIN	2003/06/18	PH-1-XXR-N			E-GREEN		SCALE		EDITION
			DESIGNED BY						ENTERPRISE CO., LTD.				
			APPROVAL BY							UNIT	m.m	A2	