


(2.54*No. of Contacts/2) 100.3

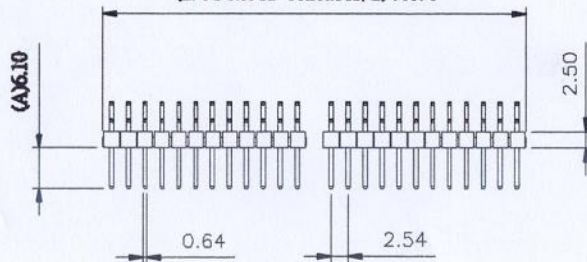



MATERIALS:

INSULATOR: P.B.T. 30% GLASS FIBER, UL94V-0
CONTACTS: BRASS OR PHOSPHOR BRONZE,
GOLD FLASH OVER NICKEL

ELECTRICAL:

CURRENT RATING: 1AMP.
INSULATION RESISTANCE: 1000M Ω MIN.
DIELECTRIC WITHSTANDING: 500VAC
OPERATING TEMPERATURE: -55°C ~ +105°C
MAX PROCESSING TEMP: 190D FOR 10 SEC.

(B) 3.00



PIN	A	B	C
	6.10	3.0	1.50

UNSPECIFIED TOLERANCE		X ± 0.2	.X ± 0.2	.XX ± 0.2	ITEN PH	MATERIAL PBT	Q'TY 0	TOOLING NO. 0	DRAWING CODE CTS-04	DARWING NO. PH-00013
REVISION	DATE	DESCRIPTION	DRAWN BY	JS	2002/04/24	PH-2-XXR-N			SCALE	EDITION
			DESIGNED BY						UNIT	m.m
			APPROVAL BY							A1