

PIN	A	B	C
01	7.6	6.0	1.58
02			

Current Rating:	3 Amps
Insulator Resistance:	5000 Megohms min
Dielectric Withstanding:	AC 500 V
Operating Temperature:	- 40° ~ +105° C
Max Processing Temp:	260D FOR 10 SEC.
Contact Material:	Copper Alloy
Insulator Material:	Polyester, UL 94V-0
	Standard: Nylon-6T

Insulator Resistance: 5000 Megohms min

Dielectric Withstanding: AC 500 V

Operating Temperature: -40° ~ +105° C

Max Processing Temp: 260D FOR 10 SEC.




Contact Material: Copper Alloy

Insulator Material: Polyester,UL 94V-0


Standard: Nylon-6T

Finish: Tin,Gold Plated

Standard: Gold Flash all over

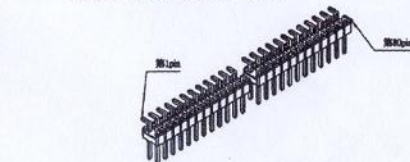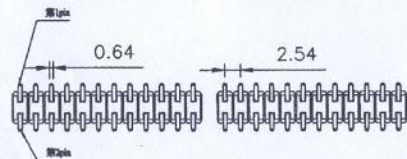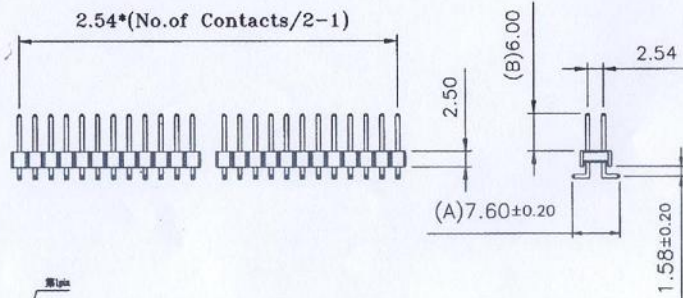

Recommended P.C. Board SMD Layout

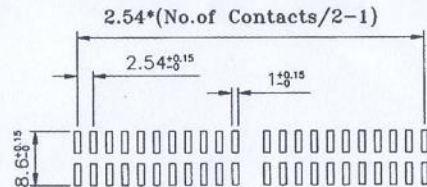

UNSPECIFIED TOLERANCE		X	.X	.XX	ITEM	MATERIAL	Q'TY	TOOLING NO.	DRAWING CODE	DRAWING NO.			
		±0.2	±0.2	±0.2	PH	NYLON-6T	0	0	CTS-04	PH-00012			
REVISION	DATE	DESCRIPTION	DRAWN BY	LIN	2003/12/10	PH-2-XXD-N			E-GREEN		SCALE		EDITION
			DESIGNED BY						ENTERPRISE CO., LTD.		UNIT	m.m	A2
			APPROVAL BY										