

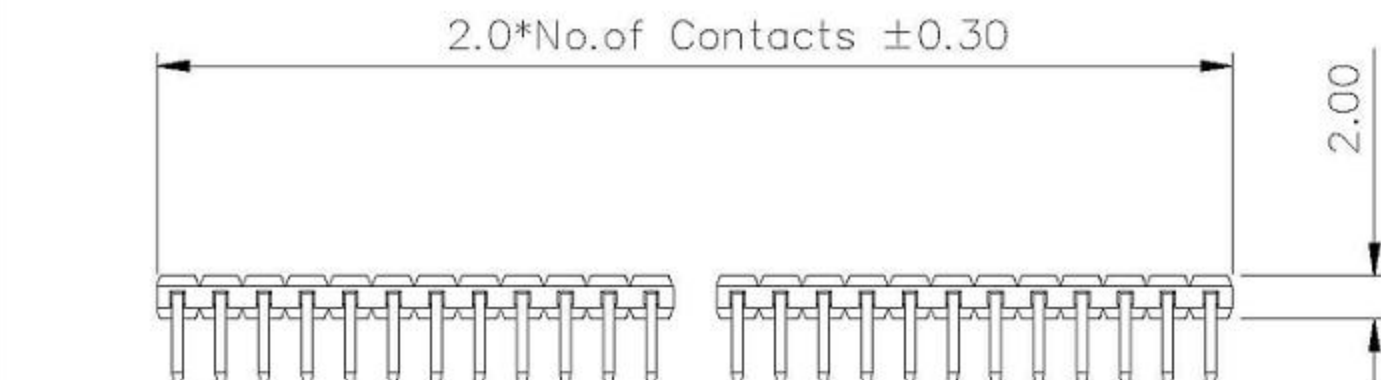
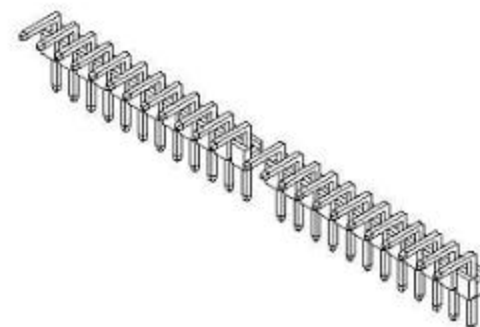


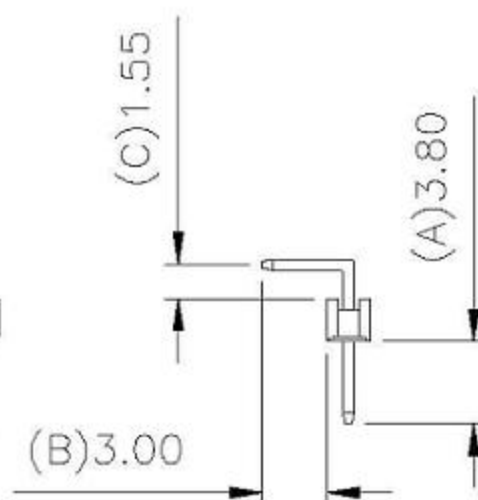

MATERIALS:
 INSULATOR: P.B.T. 30% GLASS FIBER, UL94V-0
 CONTACTS: BRASS OR PHOSPHOR BRONZE,
 GOLD FLASH OVER NICKEL

ELECTRICAL:
 CURRENT RATING: 1AMP.
 INSULATION RESISTANCE: 1000M Ω MIN.
 DIELECTRIC WITHSTANDING: 500VAC
 OPERATING TEMPERATURE: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

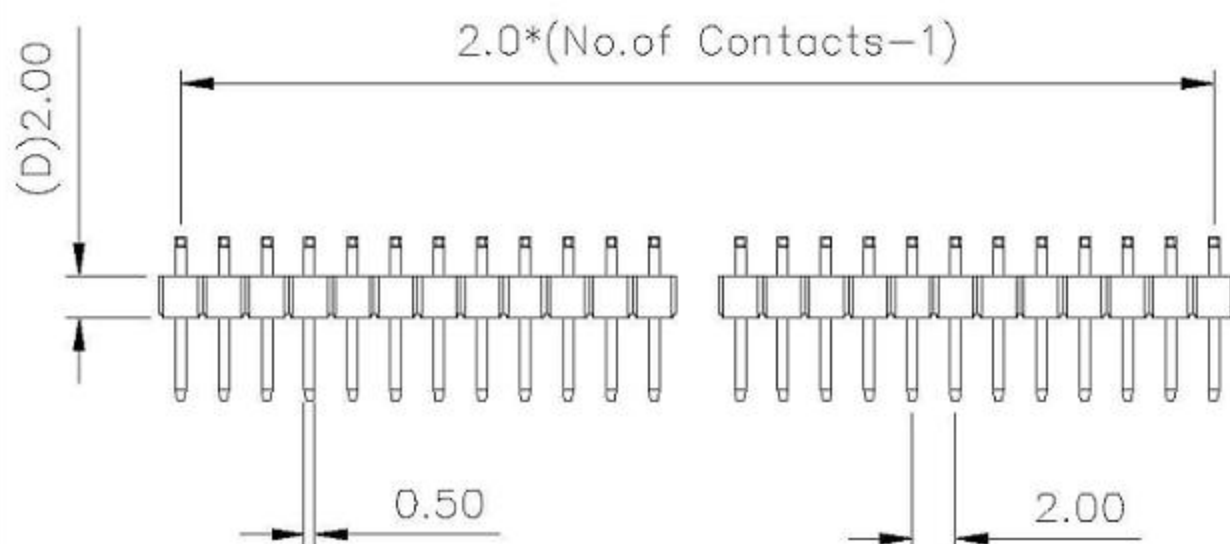

PIN	A	B	C	D
01	3.8	3.0	1.55	2.0
02				1.5

UNSPECIFIED TOLERANCE		X	.X	.XX	ITEN	MATERIAL	Q'TY	TOOLING NO.	DRAWING CODE	DARWING NO.
		± 0.2	± 0.2	± 0.2	PHA	PBT	0	0	CTS-04	PHA-00001
REVISION	DATE	DESCRIPTION	DRAWN BY	JS		2002/04/24	PHA-1-XXR-N		E-GREEN	
			DESIGNED BY				ENTERPRISE CO., LTD.		SCALE	EDITION
			APPROVAL BY						UNIT	A1