




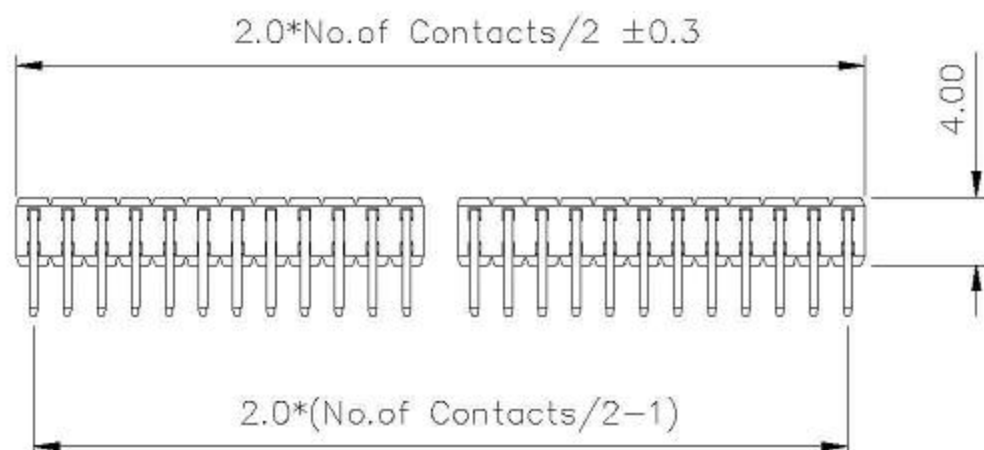


MATERIALS:

INSULATOR: P.B.T. 30% GLASS FIBER, UL94V-0
CONTACTS: BRASS OR PHOSPHOR BRONZE,
GOLD FLASH OVER NICKEL

ELECTRICAL:

CURRENT RATING: 1 AMP.
INSULATION RESISTANCE: 1000M Ω MIN.
DIELECTRIC WITHSTANDING: 500VAC
OPERATING TEMPERATURE: -55°C ~ +105°C

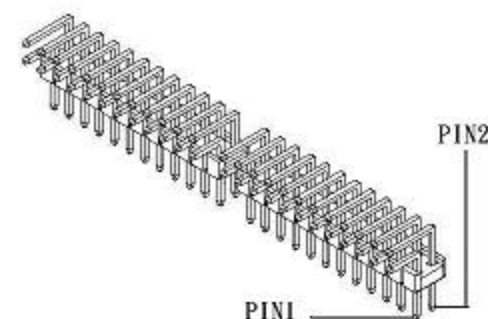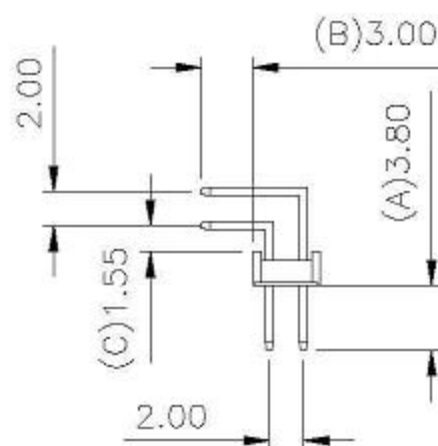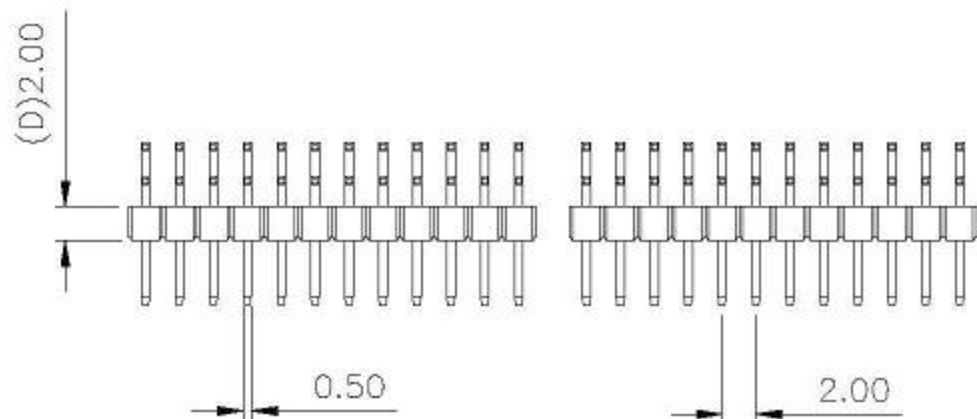

PIN	A	B	C	D
01	3.8	3.0	1.55	2.0
02				

UNSPECIFIED TOLERANCE		X	.X	.XX	ITEN	MATERIAL	Q'TY	TOOLING NO.	DRAWING CODE	DARWING NO.		
		±0.2	±0.2	±0.2	PHA	PBT	0	0	CTS-04	PHA-00004		
REVISION	DATE	DESCRIPTION	DRAWN BY	JS	2002/04/24	PHA-2-XXR-N	E-GREEN	ENTERPRISE CO., LTD.	SCALE		EDITION	
			DESIGNED BY							UNIT	m.m	A1
			APPROVAL BY									