
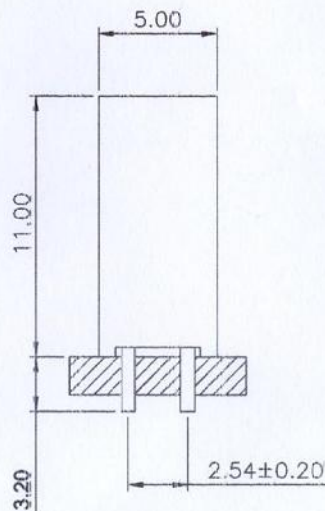
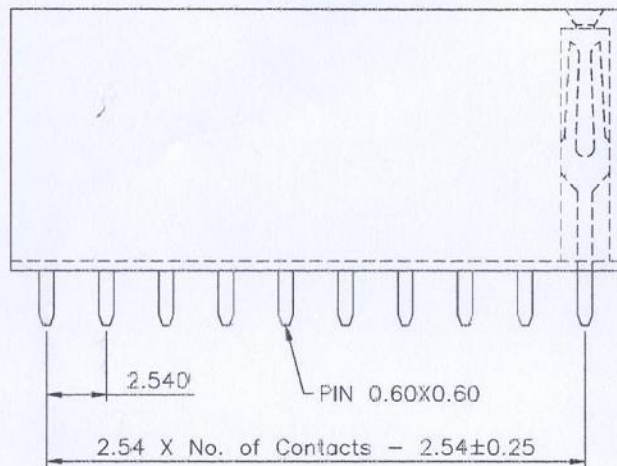


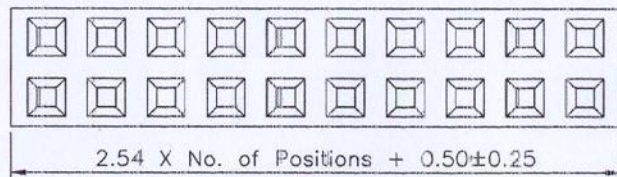

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 600V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze


Insulation Material: Polyester, UL 94V-0

P.B.T

MAX PROCESSING TEMP: 190D FOR 10 SEC.

Recommended P.C.Board

Hole Layout



UNSPECIFIED TOLERANCE	×	.×	.XX	ITEN	MATERIAL	Q'TY	TOOLING NO.	DRAWING CODE	DRAWING NO.	
	±0.2	±0.2	±0.2	PB-H110	PBT	0	0	CTS-04	2002/07/01-66	
REVISION	DATE	DESCRIPTION	DRAWN BY	SS/MON	2002/07/01	PB-2-XXS-H110A-N	E-GREEN ENTERPRISE CO., LTD.	SCALE		EDITION
			DESIGNED BY					UNIT	m.m	A
			APPROVAL BY							