


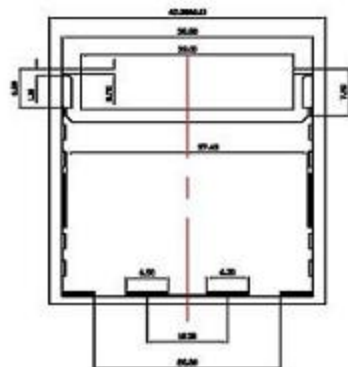


MATERIAL: PBT+30%G.F(UL94 -V0)

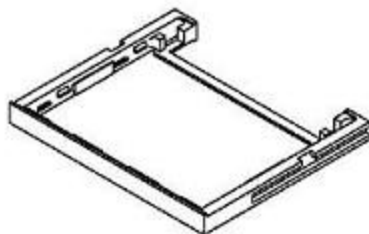

18:

PART NO :
GROUPS : B-1

DRAWING NO. :



1250P

NE
ENGINEERING

POSITION OF GATE AND EJECTORS TO
BE APPROVED BY CUSTOMER
"S" DENOTES SMALL, END OF TAPER
"L" DENOTES LARGE, END OF TAPER




NOTE:
1. MATERIAL: SUS304 $t=0.2\text{mm}$

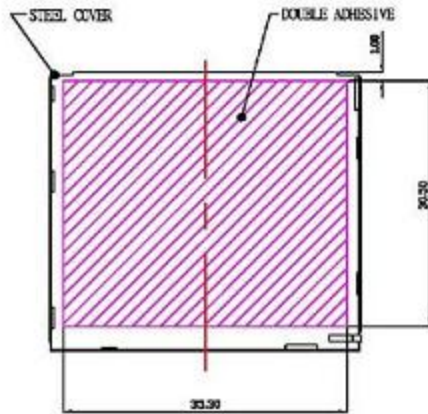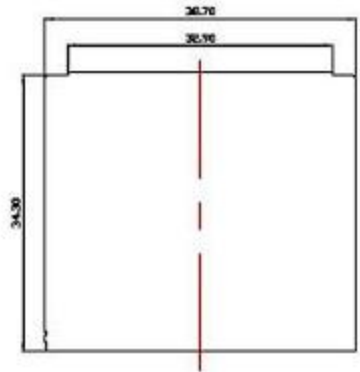

E-GREEN ENTERPRISE CO., LTD.

	UNITS	APPROVED BY: JACK		TITLE: CP-CARD	
	mm	CHECKED BY: DON 22/01/08		PART NO.: CFSM50-C2	
$x \pm 0.30$	$x' \pm 2^\circ$	DRAWN BY: BRUCE 22/01/08		DRAWING NO.: 1250P	
$x \pm 0.20$	$x' \pm 1^\circ$				
$xx \pm 0.10$	$xx' \pm 0.3^\circ$				

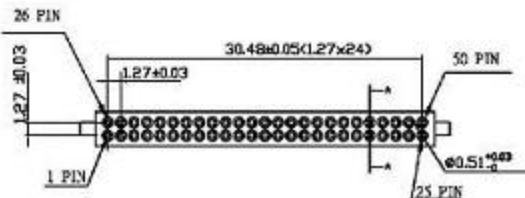






ORDERING INFORMATION

CF SM 50 A K P
1 2 3 4

- (1). Series No.: CF-CF-CARD
- (2). SM: Female, SMT.
- (3). 50: 50 pos.
- (4). *: A=0.30mm ; B=0.65mm.

NOTES:

1. MATERIAL
HOUSING: LCP , COLOUR BLACK.
CONTACT: PHOSPHOR BRONZE C5210EH 0.1T.
CONTACT AREA: 1"GOLD, 5"GOLD, 15"GOND,
UNDER PLATING: NICKEL OVERALL,
SOLDER TAIL AREA:TIN/LEAD
2. ELECTRICAL
VOLTAGE: 100V,
CURRENT: 0.5A,
CONTACT RESISTANCE: Ω 400M MAX,
DIELECTRIC WITHSTANDING: 500V AC,
INSULATION RESISTANCE: Ω 1000M MIN,
3. MECHANICAL
CONTACT RETENTION TO HOUSING:4.9N MIN,
MATING FORCE: 39.2N MAX,
UNMATING FORCE: 6.67N MIN,
DURABILITY: 10,000 CYCLES,

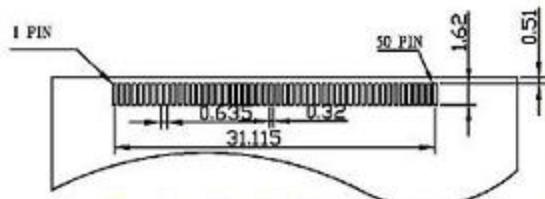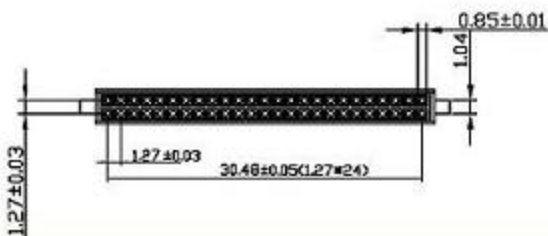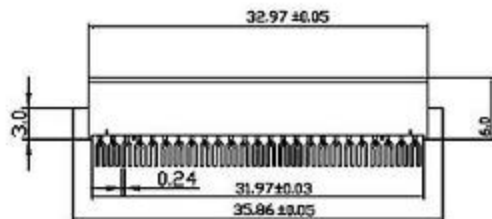

P. C. B LAUOT

E-GREEN ENTERPRISE CO., LTD.

	UNITS		APPROVED BY:		TITLE:	
	mm		JACK		CF-CARD	
X: ±0.30	X' ± 2°	DESIGNED BY:	DON 10/06/04		PART NO. 1	
.X ±0.20	.X' ± 1°	DRAW BY:	BRUCE 10/06/04		CF50AKP	
.XX ±0.10	.XX' ± 0.3°	DESIGNED NO.:			1250P	