
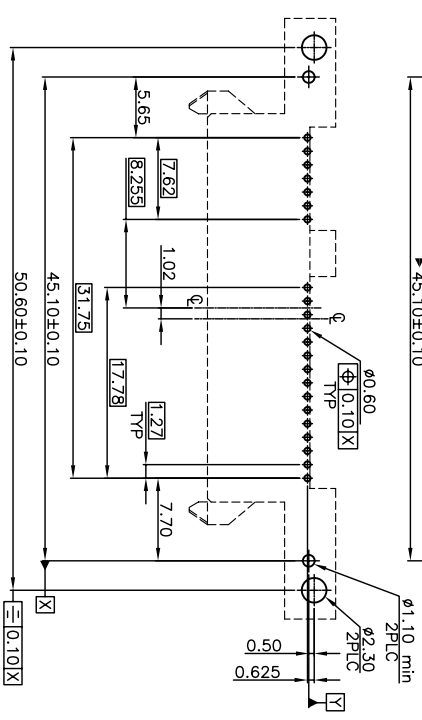
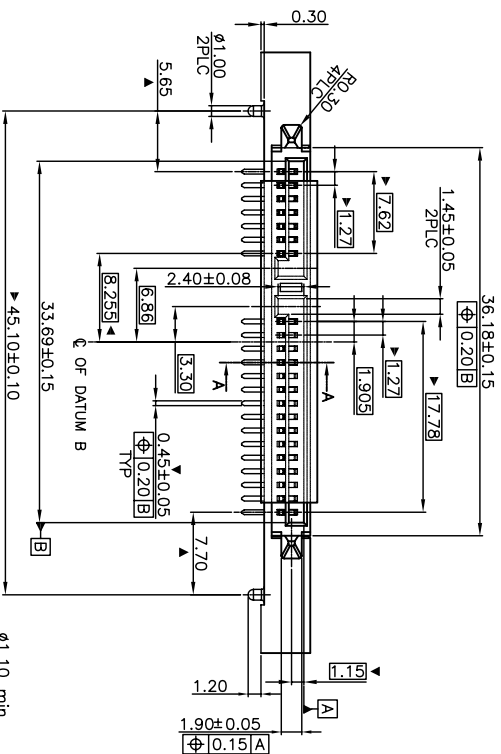
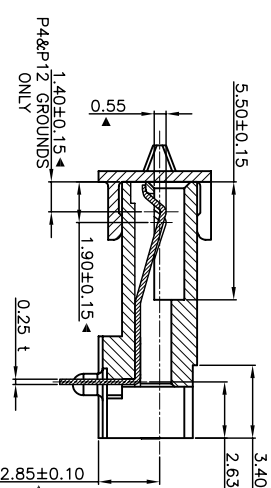


NOTES:
1.MATERIAL:
HOUSING:ICP(POLYPLASTICS E130I))WITH 30% G/F UL94 V-0
COLOR:BLACK
CAP:NY6T(MITSUI C430N))WITH 30% G/F UL94 V-0
COLOR:BLACK
CONTACT:PHOSPHOR BRONZE C5191 H.T=0.25mm
NUT:BRASS C2660R-H,M2
2.FINISH:
CONTACT:15u" GOLD/TIN PLATING ON CONTACT AREA
100u" MIN.TIN PLATING ON SOLDERALS
50u" MIN.NICKEL UNDERPLATING OVER ALL
NUT:50u" MIN.NICKEL UNDERPLATING OVER ALL

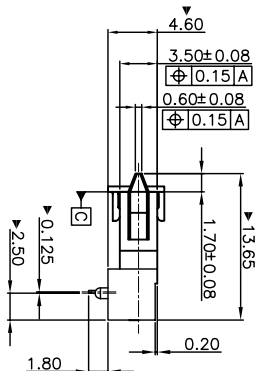

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE: 4:1	NUMBER:	E-GREEN ENTERPRISE CO., LTD.					
  	MM	INCH	MATERIAL:	HRC:						
	.X	±0.25	.X	±----					DRAWN BY	DATE
	.XX	±0.15	.XX	±----					JANET	050804
	.XXX	±0.05	.XXX	±----					CHECKED BY	DATE
	ANGULAR ±3°		050804	ION						
	DRAFT WHERE APPLICABLE		APPROVED BY	DATE						
	WITHIN DIMENSIONS									
TITLE: SATA 7+15P STANDARD FEMALE DIP										
L=4.6mm W/Nut										
 THIRD ANGLE PROJECTION			REUSE ON CAD ONLY							
PART NO. SA2C22-CX301XA			DWG NO. SAT-A-1301C2A			SHEET NO. 1/1				
						A4				